
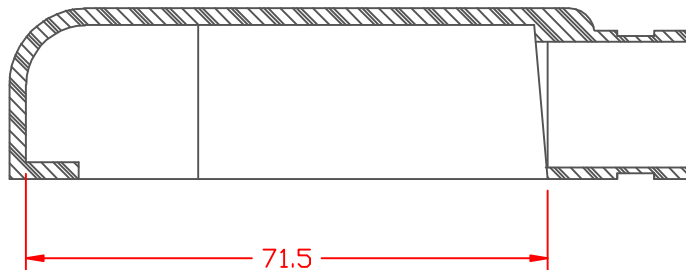
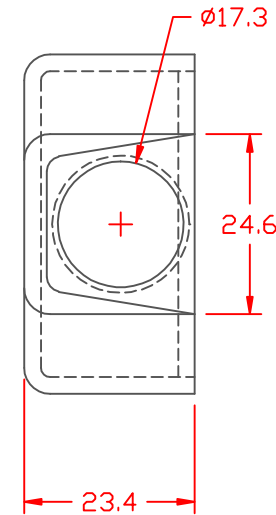


PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.


TYP. WALL THICKNESS = 2.3

| LTR. | REVISIONS | DATE |
|------|-----------|----------|
| ≠ | ***** | 00-00-98 |

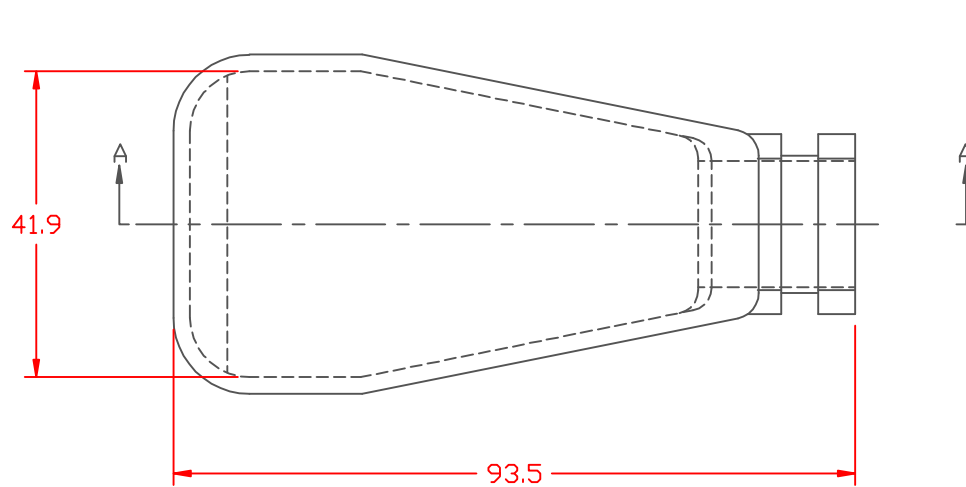


SECTION A-A

| | |
|-----------------------------|-------------------|
| VTE Material Part No: | 1101650102 |
| Material: | RED PVC |
| Material Part No: | 9812-65-RED683 |
| Max. Operating Temp: | 105 C |
| Shore Durometer: | "A" 10 SEC. 67/62 |
| Specific Gravity: | 1.34 |
| Ult. Elongation %: | 475 |
| Brittle Temp: | -44 C |
| Tensile Strength PSI: | 1547 PSI |
| Dielectric Strength, v./ml: | 540 |
| U.L. Rating: | 94 V2 |
| MEETS: | FMVSS.302 |



TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.030"/\pm 0.8\text{mm}$
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

| | | | |
|---|-----------|---|--------------------|
|  | | VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914 | |
| | | REF: | DATE: |
| | 3-30-98 | CHK'D BY: | 064 LBS. / 28.9 G. |
| TITLE: BATTERY CABLE BOOT | | | |
| MATERIAL: | | PART NO. | |
| | | 430N8V02 | |
| COLOR: | DRG CLASS | | |