
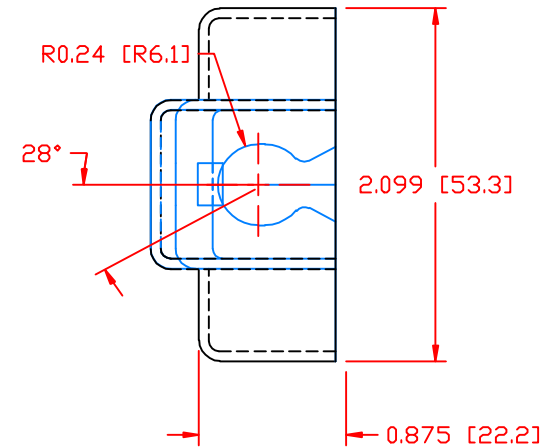


PROPRIETARY RIGHTS ARE CLAIMED FOR THE INFORMATION DISCLOSED IN THIS DRAWING. RELEASE OF THIS DESIGN TO ANY THIRD PARTY CONSTITUTES A VIOLATION OF OUR COPYRIGHT.

LTR.	REVISIONS	DATE
∧	ADDED WALL SECTION AT REAR OF SHROUD	06-04-99

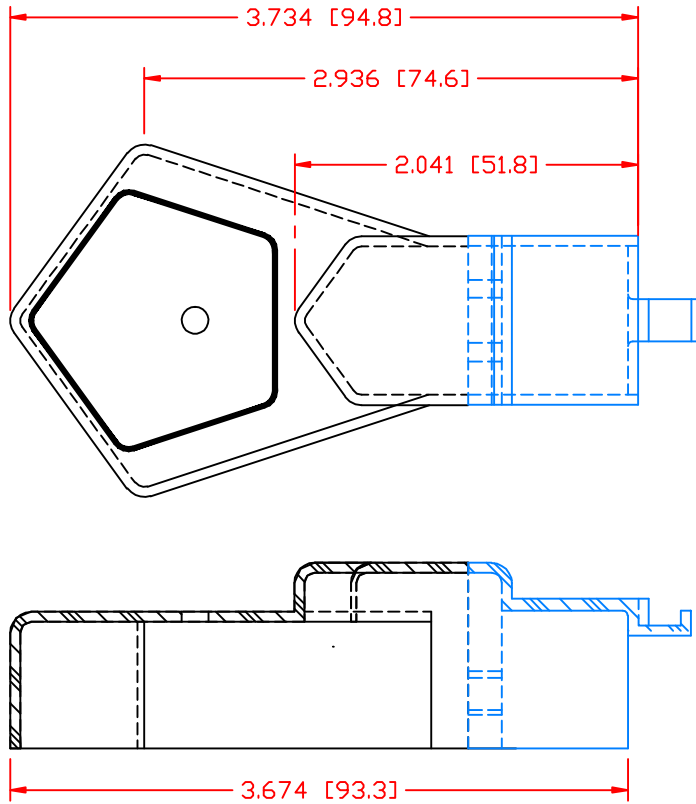

436N5

DESIGNED TO FIT 35, 50 OR 70 mm² METRIC CABLE

Material:
Material Part No
Shore Durometer
Specific Gravity:
Ult. Elongation %:
Tensile Strength PSI:
U.L. Rating:

RED PVC
M105-95 RD
"A" 10 SEC. 98/92
1.42
217
2123
94 V2

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: ***	DATE: 06-15-99	DRN BY: BRH	WEIGHT: ***
TITLE: BATTERY TERMINAL INSULATOR		CHK'D BY:	SCALE: NONE
MATERIAL: *****	PART NO. 436N5 V02		
COLOR: ***	DRG CLASS: ****		