


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.


LTR.	REVISIONS	DATE
A	3874-000 WAS 3872, 3873-001 WAS 3873	03OCT06
B	ADDED SUB-ASSEMBLY P/N 73873-001	11OCT06
C	3842-001 ADDED 1 PLC., 3842-002 REMOVED 1 PLC.	20APR07
D	3842-003 WAS 3842-002	22AUG07
E	COVER 312N9*** WAS 313N0V00	02OCT08

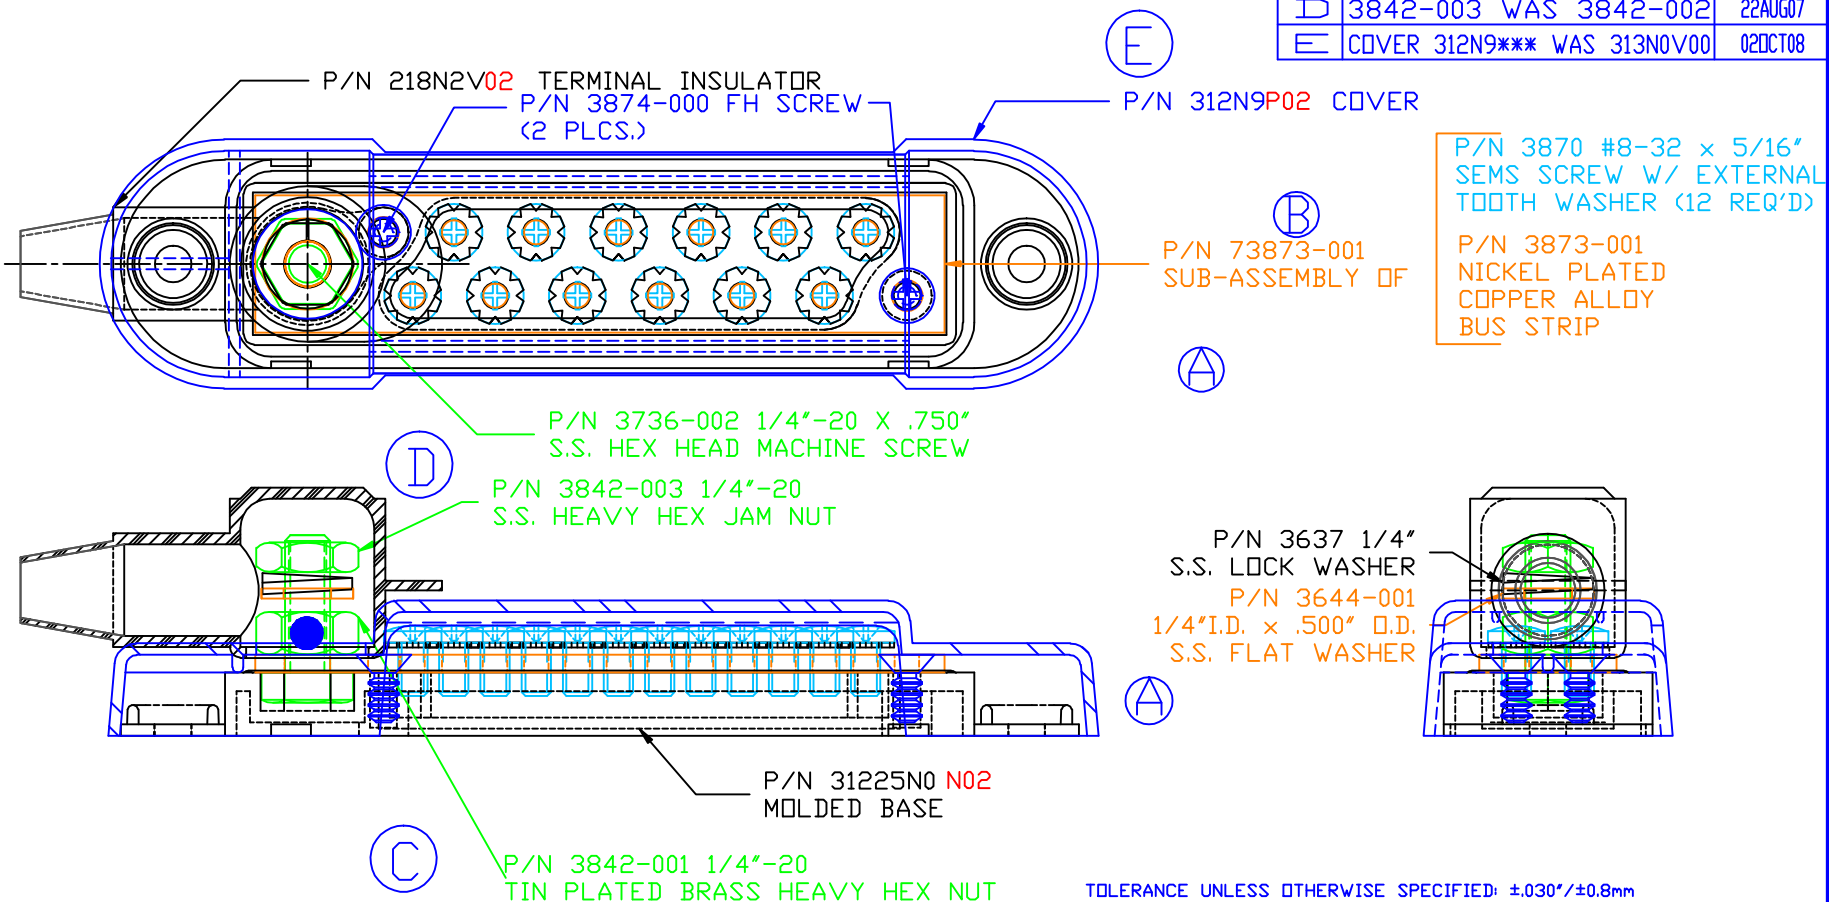

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB

TESTED AT 240 AMPS @ 12VDC FOR 30 MINUTES, MAXIMUM TEMPERATURE RISE WAS 7.8 DEG. C. MAXIMUM TEMPERATURE RECORDED WAS 30.6 DEG. C.



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: ***	DATE: 22AUG05	DRN BY: BRH	WEIGHT: ***
TITLE: 12-POINT TERMINAL STRIP			SCALE:
MATERIAL:		PART NO.	
COLOR: ****	DRG CLASS: ****	71225N02	