


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
⌒	ADDED PERFORMANCE SPECS	30OCT08

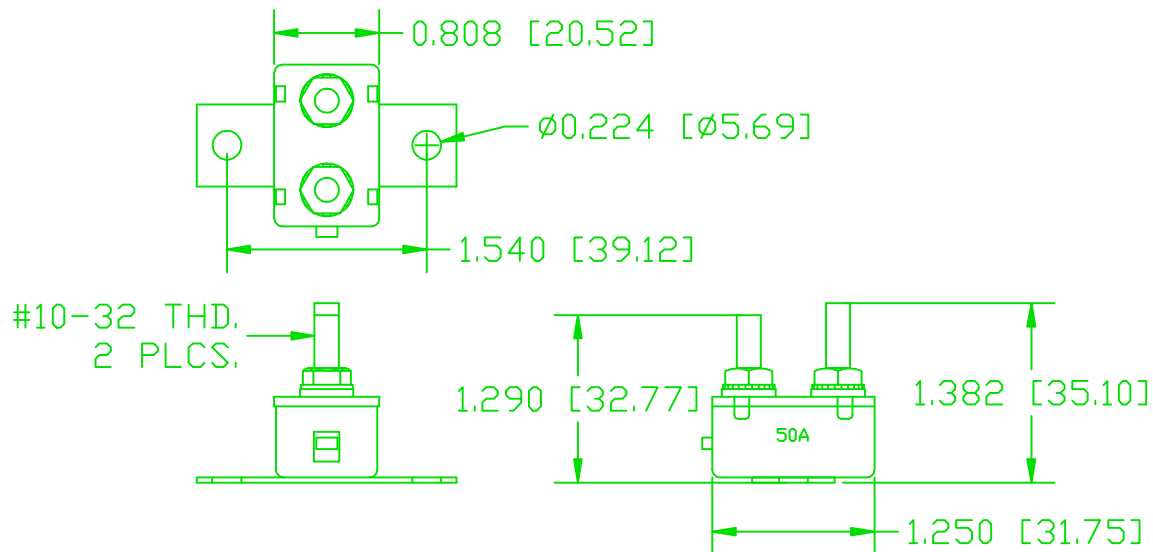


AVAILABLE AMPERE RATING	CURRENT	TRIP TIME
20	135%	27 sec
	200%	8 sec
30	135%	1 min 43 sec
	200%	7 sec
40	135%	37 sec
	200%	9 sec
50	135%	21 sec
	200%	4 sec

(A)

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.30"/±0.8mm  
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

DO NOT SCALE



**VTE Incorporated**  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

REF: ***	DATE: 21SEP04	DRN BY: BRH	WEIGHT: ***
TITLE: CIRCUIT BREAKERS CHARTED		CHK'D BY: BRH	SCALE:
MATERIAL:		PART NO.	
COLOR: ****	DRG CLASS: ****	RCB***	