
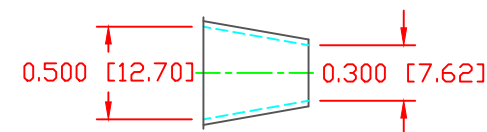
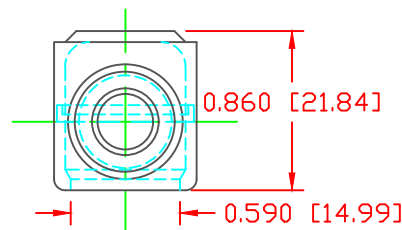



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
	RELEASE TO PRODUCTION	07-07-20	

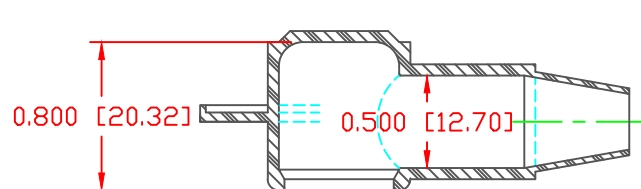

SECTION A-A
TYP. WALL THICKNESS = .060" [1.5]
SEAL NO. 2 SHOWN

SEAL THICKNESS = .030" [.8]
NO. 2
Cable Gages
8 - 2

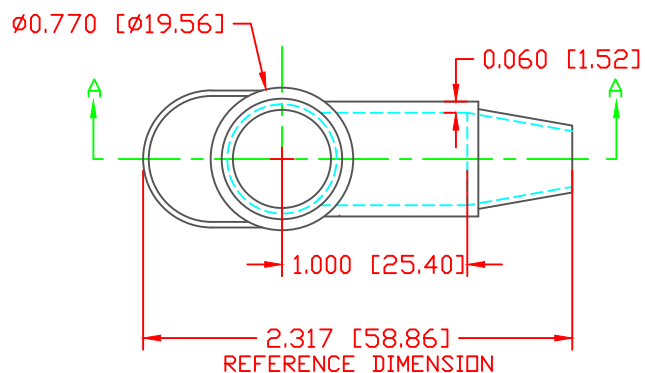

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE

MATERIAL PART NO:	7104750102
MATERIAL:	FORPRENE
VENDOR PART NO:	6NM001A75/PP34820813-ZT
SHORE DUROMETER:	"A" 15 SEC. 77
SPECIFIC GRAVITY:	0.95
ELONGATION%:	475
MELTING TEMP:	350-400 [176-204]
BRITTLE TEMP:	-76 [-60]
TENSILE STRENGTH PSI:	972
DIELECTRIC STRENGTH, V./mil:	534
U.L. RATING:	HB E187982

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF:	DATE:
	07-07-2020	CHK'D BY: PJK	4.98 g
TITLE: TERMINAL INSULATOR CAP			
MATERIAL: FORPRENE		PART NO.	
COLOR: RED	DRG CLASS RTP	216N2E02	