THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
P	ADD TAB AND LETTERING	09-13-95	BRH
Q	ADD FILLETS TO TAB	09-13-95	BRH
R	REPLACED GEOLAST WITH ALCRYN	10-12-23	RAS

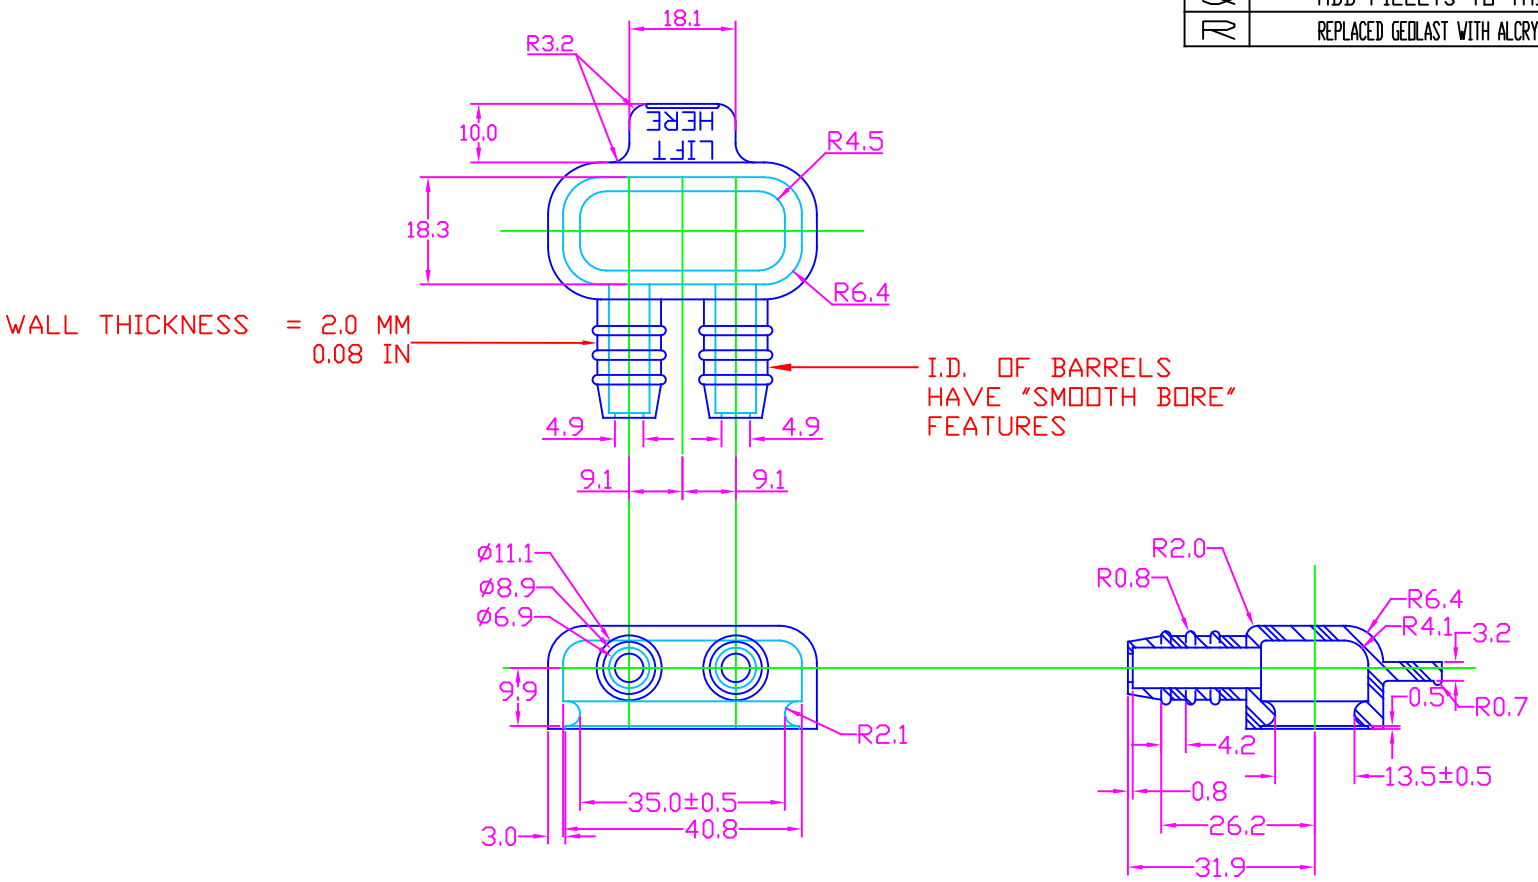

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE

MATERIAL PART NO:	1103680114
MATERIAL:	BLACK MPR
VENDOR PART NO:	ALCRYN 2070 BK
SPECIFIC GRAVITY:	1.14
HARDNESS 15 SEC:	68
HARDNESS SCALE:	A
TENSILE STRENGTH, PSI:	1220
ELONGATION, %:	280-320
TEAR STRENGTH, PPI:	159
FLAME CLASS UL:	HB
BRITTLENESS TEMP., DEGREES F [C]:	-110 [-79]
MELT TEMP., DEGREES F [C]:	351 [177]
DIELECTRIC STRENGTH, V./MIL:	381
MAXIMUM OPERATING TEMP., F [C]:	225 [107]
SHELF LIFE:	10 Yrs

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: CUSTOMER DIMS	DATE: 10-24-94	DRN BY: BRH CHK'D BY: BRH	WEIGHT:
TITLE: INJECTOR PUMP SOLENOID BOOT			
MATERIAL: ALCRYN		PART NO. 23550532	
COLOR: BLACK	DRG CLASS REV R		