
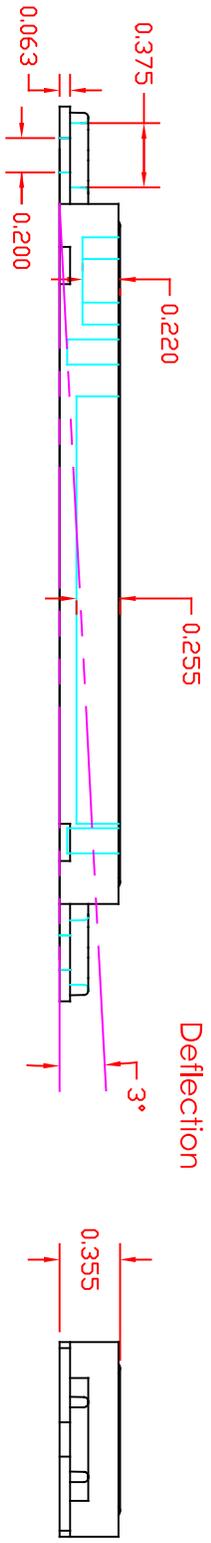


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

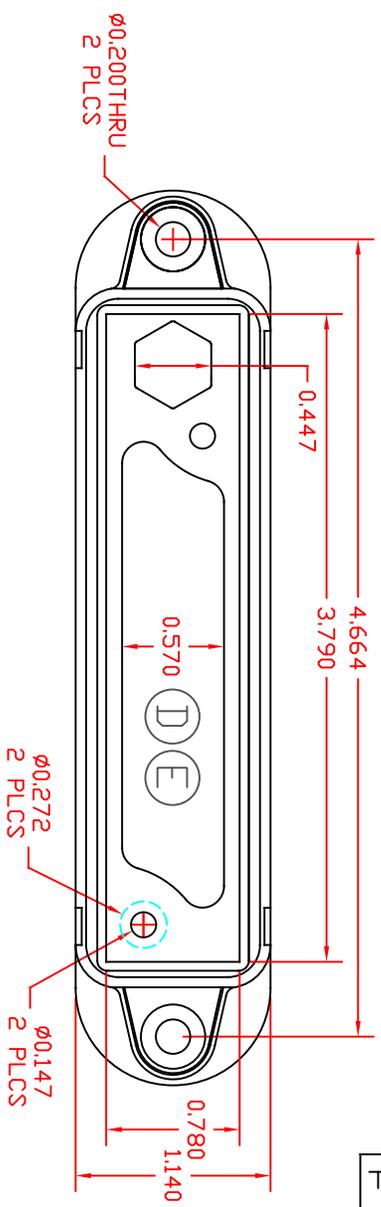

Maximum Allowable Deflection

LTR	REVISIONS	DATE	INT.
A	.355 WAS .315, .345 WAS .305, .255 WAS .215, .245 WAS .205, .220 WAS .180, .210 WAS .170 ADDED DIMENSIONS FOR FEATURE LINE ON FACE SURFACE	12AUG05	BRH
B	ADDED R. 0.060" PLCS, R0.250" WAS .500"	14JUN07	BRH
C	REVISED MATERIAL INFORMATION	07-17-18	RAS
D	ADDED CRITICAL DIMENSION	04/21/22	RAS
E	0.570 WAS 0.595	5/19/23	RAS
F	ADDED "ALLOWABLE DEFLECTION" NOTE	8-19-24	RAS

SCALE FACTOR : NONE
 ALL DIMENSIONS GIVEN AS: mm [in]
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 MOLDED PARTS: ±.030" [±0.8mm]
 HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO: 7111210502
 MATERIAL: GLASS FILLED NYLON
 VENDOR PART NO: HYLON N2015 HL NAT
 SPECIFIC GRAVITY: 1.23
 MELTING TEMP: 515 F [268 C]
 U.L. RATING: UL 94 HB



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
	27 JUN05	CHK'D BY:	BRH	19 G. / .042 LBS.
TITLE: 1/4" 12 WAY CONTACT BLOCK BASE				
MATERIAL: GLASS FILLED NYLON			PART NO:	
COLOR: RED	DRG CLASS	REV F	31225N02	