


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.



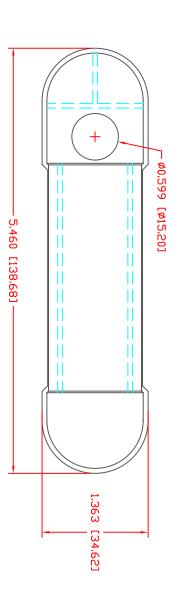






ASH FILLER CONTENT TENSILE STRENGTH, YIELD; DENSITY (G/CM³); NOTCHED IZOD IMPACT; MFI (230DEG C /2.1kg); FLAME CLASS UL; 1.25 38% 0.6 ft-lb/in 33 MPa 1209650315 9/10 min

MATERIAL PART NO: VENDOR PART NO:

POLYPROPYLENE MAFILL CR HT 5641



SCALE FACTOR: NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE

Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 5437 Robinson Road, P.D. Box Incorporated

| m | | | | |
|--------------------|----------------|---------------------|-------------------|---------|
| COLOR: YELLOW | MATERIAL: POLI | TITLE: | CUSTOMER DIMS | REF: |
| DRG CLASS REV A | POLYPROPYLENE | COVER, 12 | 10-01-08 | DATE: |
| PART ND. 312N9P05 | | COVER, 12 POINT BUS | CHK'D BY: BRH | DRN BY: |
| | | | BRY. | BRH |
| | | | .029 LBS [13.2 g] | WEIGHT: |

DO NOT SCALE