


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.



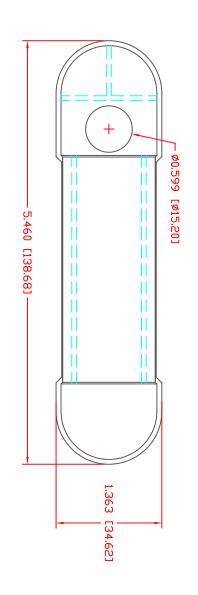





MATERIAL: ASH FILLER CONTENT TENSILE STRENGTH, YIELD: DENSITY (G/CM³): NOTCHED CHARPY IMPACT, 23C: MFI (230DEG C/2.1kg): FLAME CLASS UL: VENDOR PART NO: PART ND:

33 MPa 1.25 2.5 kJ/M² 13 g/10 mir HB POLYPROPYLENE MAFILL CR HT 6644 1209720314 9/10 min ェ

SCALE FACTOR: NONE
ALL DIMENSIONS GIVEN AS: IN [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE



5437 Robinson Road, P.D. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914 Incorporated

| гч | | | | |
|--------------------|------------------|---------------------|-------------------|-------------|
| COLOR: BLACK | MATERIAL: POL | TITLE | CUSTOMER DIMS | REF: |
| DRG CLASS REV A | POLYPROPYLENE | COVER, 12 | 10-01-08 | DATE: |
| PART ND. 3121 | | COVER, 12 POINT BUS | CHK'D BY: BRH | DRN BY: BRH |
| 312N9P14 | - | | .029 LBS [13.2 g] | WEIGHT: |

DO NOT SCALE