
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED, ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. YEE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.



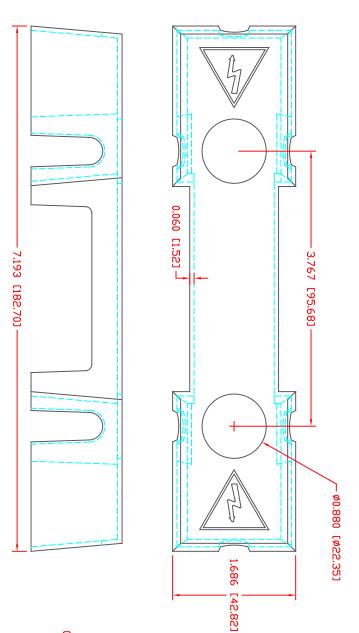


0.981 [24,90]

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
ASH FILLER CONTENT
TENSILE STRENGTH, YIELD:
DENSITY (G/CM³):
NOTCHED IZOD IMPACT:
MFI (230DEG C /2.1kg):
FLAME CLASS UL:

1209650315
PDLYPROPYLENE
MAFILL CR HT 5641
38%
33 MPa
1.25
0.6 ft-lb/in
13 g/10 min
HB

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLORANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE



VTE Incorporated
5437 Robinson Road, P.D. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000

)P02	322N9P02	ω	SS REV B	DRG	RED	COLOR:
		PART NO.	POLYPROPYLENE	/PROP		MATERIAL:
	70	SBAR COVER	10 POINT BUSBAR COVER			TITLE
.07 LBS [31.7 g]	BRH	CHK'D BY: BRH	10-12-06	ī	CUSTOMER DIMS.	CUSTOM
WEIGHT:	BRH	DRN BY:	E:	DATE:		REF:

DO NOT SCALE