
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED, ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

M	\triangleright	LTR.
UPDATED MATERIAL INFORMATION	ADDED INTERNAL RIBS IN 4 PLACES	REVISIONS
8-11-22	11-05-07	DATE
RAS	BRH	INT.

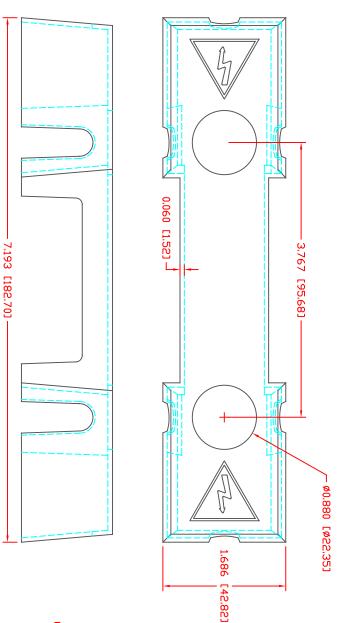

0.981 [24,90] 1.247 [31,67]

NOTCHED IZOD IMPACT: MFI (230DEG C /2.1kg): FLAME CLASS UL: ASH FILLER CONTENT TENSILE STRENGTH, YIELD: DENSITY (G/CM³); MATERIAL PART NO: VENDOR PART NO:

33 MPa 1.25 0.6 ft-lb/in 13 g/10 min HB POLYPROPYLENE MAFILL CR HT 5641 38% 209650315

SCALE FACTOR: NONE
TOLDRANCES UNLESS OTHERWISE SPECIFIED:
MOLDED PARTS: ±.030" (±0.8mm)
ALL ANGLES ARE ± 1 DEGREE



VTE INCOMPONATED
5437 Robinson Road, P.D. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-YTE

FAX: 231-539-0914 231-539-8000

CUSTOMER DIMS. DATE 10-12-06 DRN BY: CHK'D BY: BRY 舽 WEIGHT: .07 LBS [31.7 ഉ

REF:

 	10 PUINT BUSBAR CUVER	SBAR CUVER
MATERIAL: POLYPROPYLENE	YLENE	PART NO.
COLOR: YELLOW DRG	REV B	322N9P05

DO NOT SCALE