



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
△	REVISED MATERIAL INFORMATION	7-17-18	RAS

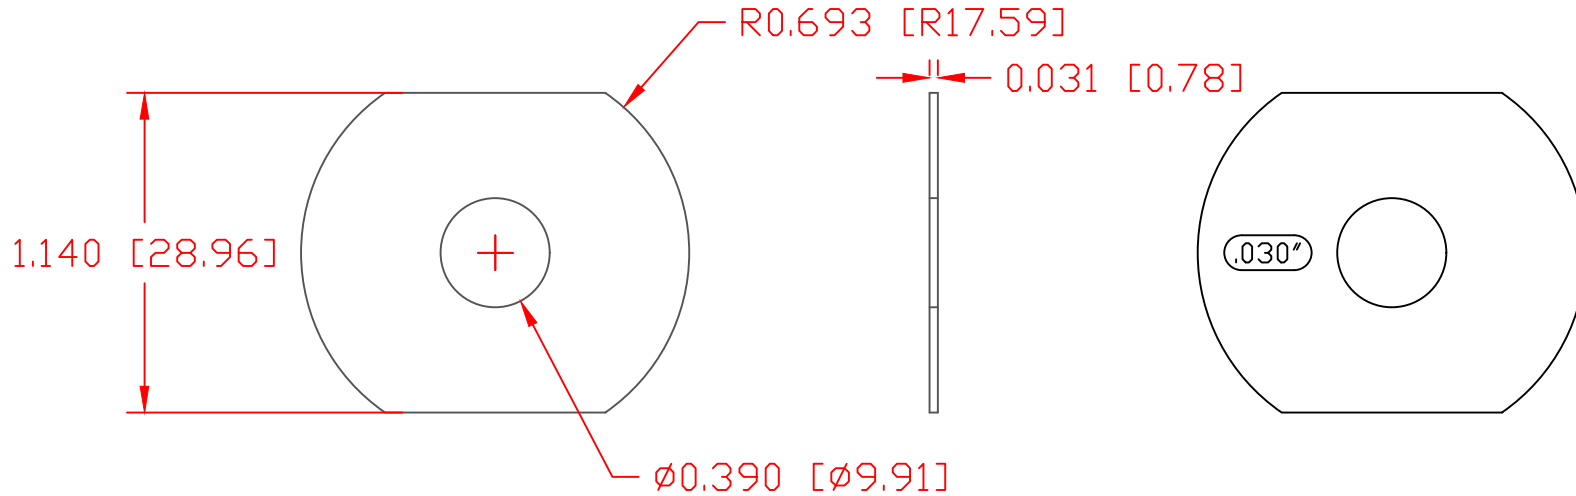

MATERIAL PART NO:	1111210515UL
MATERIAL:	GLASS FILLED NYLON
VENDOR PART NO:	HYLON N2015 HL NAT
SPECIFIC GRAVITY:	1.23
MELTING POINT DEGREES C:	268
MELTING POINT DEGREES F:	515
MAXIMUM ACCEPTABLE MOISTURE CONTENT:	.2%
FLAME RATING:	UL 94 HB

SCALE FACTOR : NONE
 ALL DIMENSIONS GIVEN AS: in [mm]
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 MOLDED PARTS: ±.030" [±0.8mm]
 HARDWARE ITEMS: ±.010" [±0.25mm]

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: CUSTOMER DIMS	DATE: 04-21-17
TITLE: .030" POWER BUSHING SPACER INSERT FOR 3/8" ASSEMBLY		CHK'D BY: RAS	
MATERIAL: GLASS FILLED NYLON		PART NO. 330H3N15	
COLOR:	DRG CLASS REV A		

DO NOT SCALE