


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
△	REVISED MATERIAL INFORMATION	7-17-18	RAS

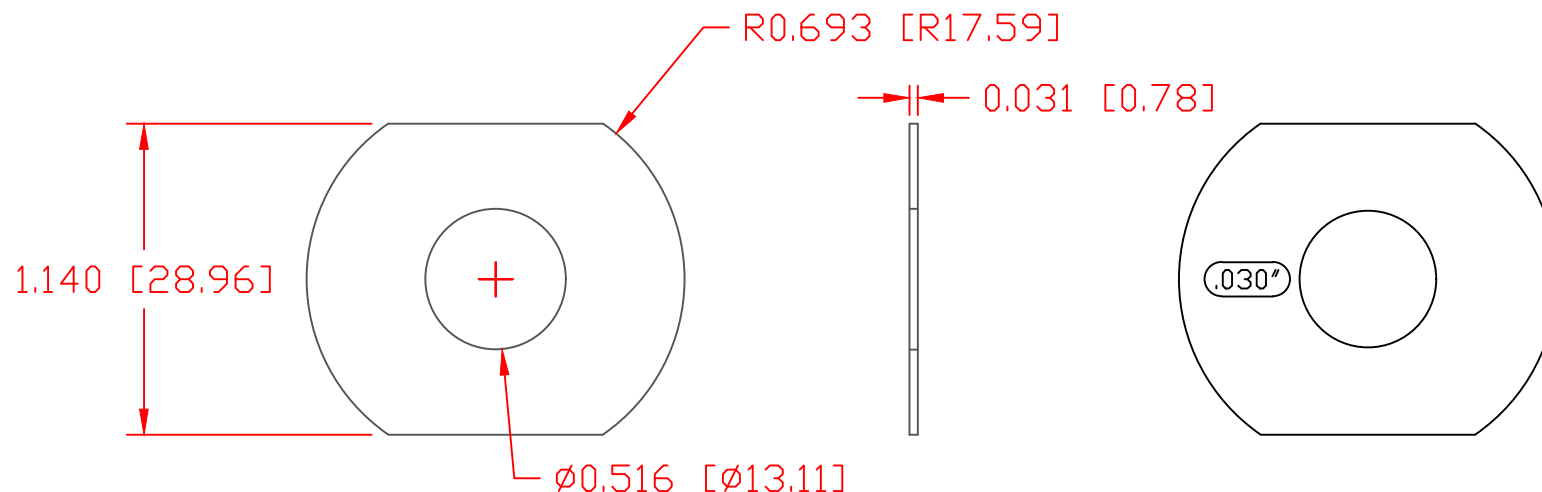

MATERIAL PART NO: 1111210515UL
 MATERIAL: GLASS FILLED NYLON
 VENDOR PART NO: NYLON N2015 HL NAT
 SPECIFIC GRAVITY: 1.23
 MELTING POINT DEGREES C: 268
 MELTING POINT DEGREES F: 515
 MAXIMUM ACCEPTABLE MOISTURE CONTENT: .2%
 FLAME RATING: UL 94 HB

SCALE FACTOR : NONE
 ALL DIMENSIONS GIVEN AS: in [mm]
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 MOLDED PARTS: ±.030" [±0.8mm]
 HARDWARE ITEMS: ±.010" [±0.25mm]

		VTE Incorporated		
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914		
REF:	DATE:	DRN BY:	RAS	WEIGHT:
CUSTOMER DIMS	04-21-17	CHK'D BY:	RAS	.008 Lb. / 3.7 G
TITLE: .030" POWER BUSHING SPACER INSERT FOR 1/2" ASSEMBLY				
MATERIAL: GLASS FILLED NYLON			PART NO.	
COLOR:			330H5N15	
DRG CLASS			REV A	

DO NOT SCALE