

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.




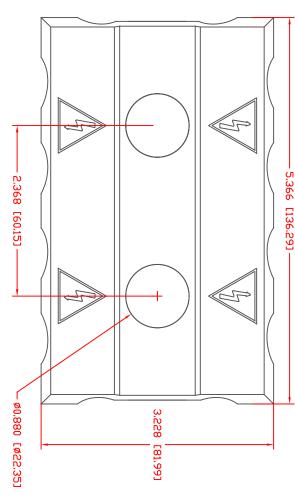

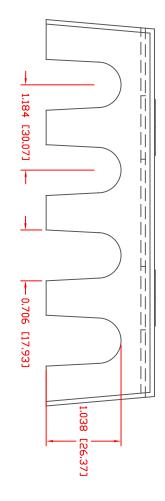

MATERIAL PART NO:
MATERIAL;
VENDOR PART NO:
ASH FILLER CONTENT
TENSILE STRENGTH, YIELD;
DENSITY (G/CM³);
NOTCHED CHARPY IMPACT, 23C;
MFI (230DEG C/2.1kg);
FLAME CLASS UL;

1209720314
POLYPROPYLENE
MAFILL CR HT 6644 H
40%
33 MPa
1.25
2.5 kJ/M²
13 g/10 min
HB



5437 Pellst Telepl FAX: 6	3/W/Z
/ 	

VTE INCOMPOMAted

5437 Robinson Road, P.D. Box 790

Pellston, Michigan 49769

Telephone: 1-800-527-9256, 231-539-800

INL
Telepi FAX: ¿
Telephone: 1-800-5 FAX: 231-539-0914
-527-9256 4
Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914

)P14	338N9P14	ω	REV B	DRG CLASS	ACK	ළ	COLOR: BLACK
			PART NO.		POLYPROPYLENE	PD	Ē	MATERIAL:
		VER	BUSBAR CON	DUAL 4 POINT BUSBAR COVER	DUA			TITLE
[38.7 g]	.085 LBS [38.7 g]		CHK'D BY: BRH	15-50-08		DIMS	MER.	CUSTOMER DIMS
	WEIGHT:	BRH	DRN BY: BRH WEIGHT:	_	DATE:			REF:

NOT SCALE