


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.



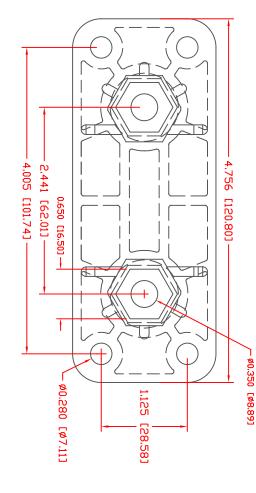

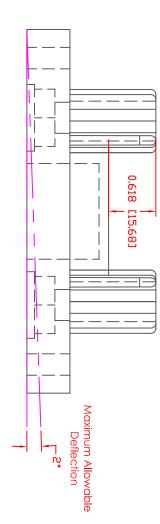



SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: In [mm]
TOLDRANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
U.L. RATING:

7111210505 GLASS FILLED HYLON N2015 | 1.23 5.15 F [2.68 C: [268 C] IZ015 HL NAT 干

H SCALE

CULUR

י אפררםא	IAL: GLASS FILLED NYLON	_ ₹	DIMER DIMS,			
DRG CLASS REV B			07-20-07	DATE:	54. Pel Tel	
353N7N05	PART NO.		CHK'D BY:	DRN BY: BRH	VTE INCORPORATED 5437 Robinson Road, P.D. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
705 1			WEIGHT: .182 LBS [82.7 g]		Drated 1. Box 790 156, 231-539-8000	

RET:

CUSTOMER D

TITLE MATERIAL: