


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
△	.750" WAS .895", 1.138" WAS 1.887", 2.106" WAS 3.000", 9/16" WAS .555"	25APR03	BRH

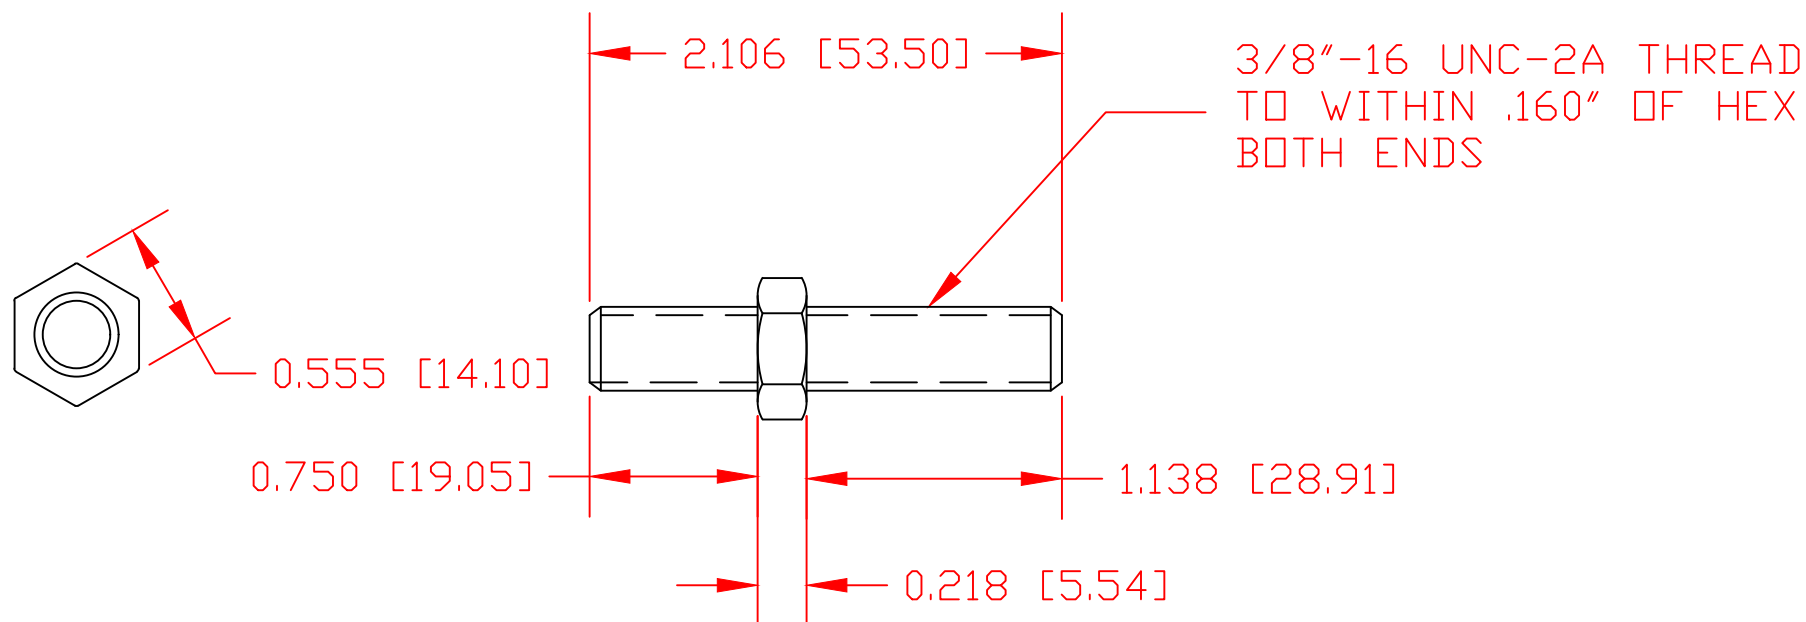

SCALE FACTOR : NONE
 ALL DIMENSIONS GIVEN AS: in [mm]
 FASTENERS MEET IFI STANDARDS
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 HARDWARE ITEMS: ±.010" [±0.25mm]

BRASS ALLOY 270/360
 ROCKWELL HARDNESS B55 MINIMUM
 TENSILE STRENGTH 55,000 PSI MINIMUM
 PARTS MUST BE CLEAN AND OIL FREE

		VTE Incorporated		
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914		
REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	1-06-03	CHK'D BY:	BRH	
TITLE:		3/8"-16 BRASS THREADED STUD		
MATERIAL:	BRASS	PART NO.		
COLOR:	DRG CLASS REV A	3739-002		