


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	.750+/- .02 WAS .848", 3.153" WAS 3.250"	10APR03	BRH
B	UPDATED .300" UNDERCUT WITH .125"	18OCT16	RAS

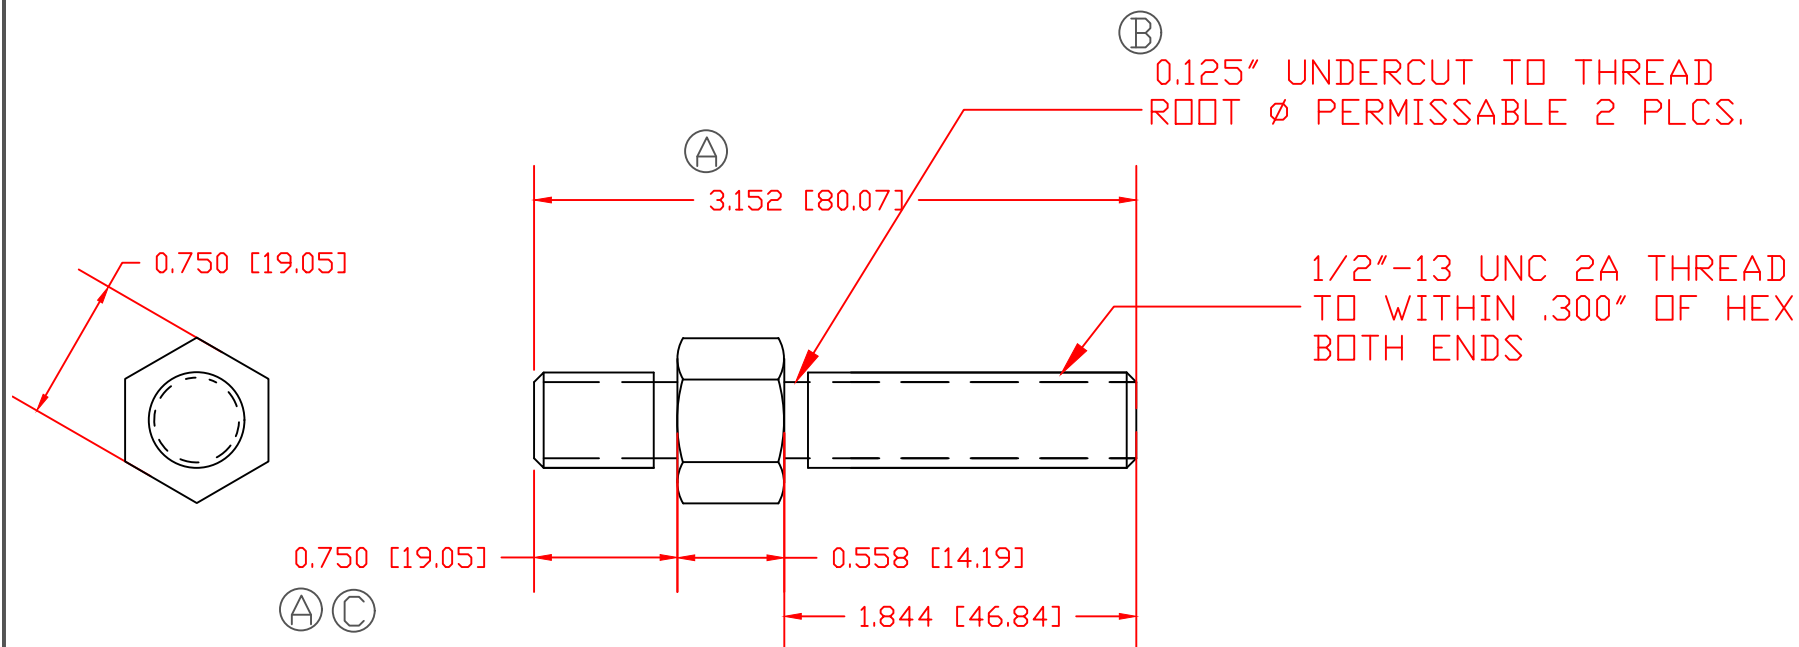

TOLERANCE UNLESS OTHERWISE SPECIFIED:
HARDWARE ITEMS: $\pm 0.010"/\pm 0.25\text{mm}$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

P/N 3753-001 BRASS HEX THREADED STUD
BRASS ALLOY 360
ROCKWELL HARDNESS B55 MINIMUM
TENSILE STRENGTH 55,000 PSI MINIMUM
PARTS MUST BE CLEAN AND OIL FREE

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE: 08JAN03	DRN BY: BRH CHK'D BY: BRH	WEIGHT:
TITLE: 1/2"-13 BRASS THREADED SHAFT			SCALE:
MATERIAL: BRASS		PART NO.	
COLOR:	DRG CLASS REV B	3753-001	