


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

ᆬ UPDATED MATERIAL INFORMATION REVISIONS 8-02-22 DATE RAS INT.

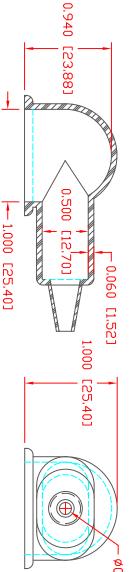




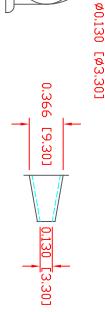

 $\frac{\text{SECTION A-A}}{\text{TYP. WALL THICKNESS}} =$.060" [1.5]

SEAL TOLERANCE: +.030/-.010 [+.8/-.25] SEAL WIRE GAGES: 18 -SEAL DETAILS THICKNESS = .030" [.8] 10

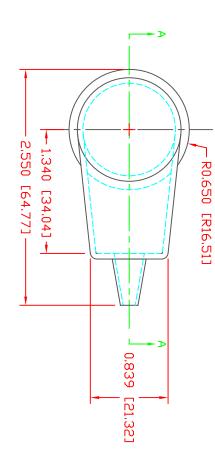



MELTING TEMP:
BRITTLE TEMP:
TENSILE STRENGTH PSI:
DIELECTRIC STRENGTH, V
U.L. RATING: VENDOR PART NO:
SHORE DUROMETER:
SPECIFIC GRAVITY:
ULT. ELONGATION %: VTE PART NO: MATERIAL:

315-335 -54 F [-1550 PSI 511 V2 1101650102 PVC 400 1.34 9812-65-RED 683 "A" 10 SEC, 65 [-48 F [157-168

DO NOT SCALE

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: IN [MM]
TOLORANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE



VTE INCOrporated
5437 Robinson Road, P.D. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000

FAX: 231-539-0914

COLOR: RED	MATERIAL:	TITLE:	CUSTOMER DIMS	REF:
DRG REV A	PVC	EYELET TERMI	02-14-05	DATE:
405N1V02	PART NO.	EYELET TERMINAL INSULATOR	CHK'D BY: BRH	DRN BY: BRH
207			.019 LBS [8.48 g]	WEIGHT: