


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
D	ALL DIMENSIONS UPDATED	11-03-20	EJE

TYP. WALL THICKNESS = 1.5 TYP. RADIUS = 1.5

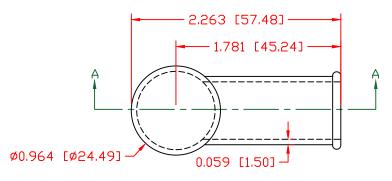

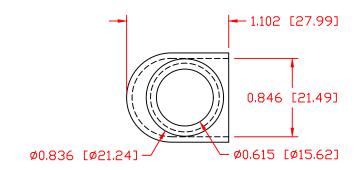




## SECTION A-A

VTE Material Part No:
Material:
Material Part No
Max. Opertating Temp:
Shore Durometer
Specific Gravity:
Ult. Elongation %:
Brittle Temp:
Tensile Strength PSI:

U.L. Rating: MEETS: 1101650114 BLACK PVC 9812-65 105 C "A" 10 SEC. 67/63 1.33 520 -36 C 1563 PSI

94 V2 FMVSS.302 ALL DIMENSIONS GIVEN AS: IN [mm] MOLDED PARTS: ±.030" [±0.8mm] HARDWARE ITEMS: ±.010" [±0.25mm]

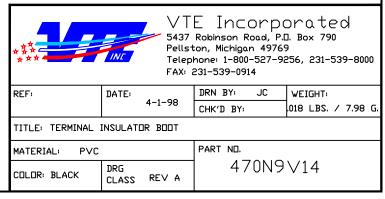

DO NOT SCALE