

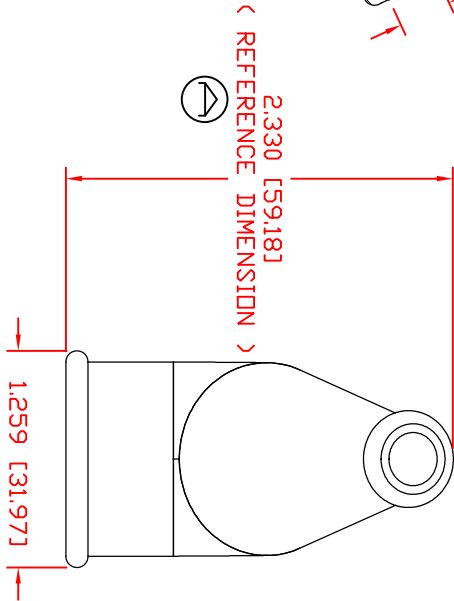
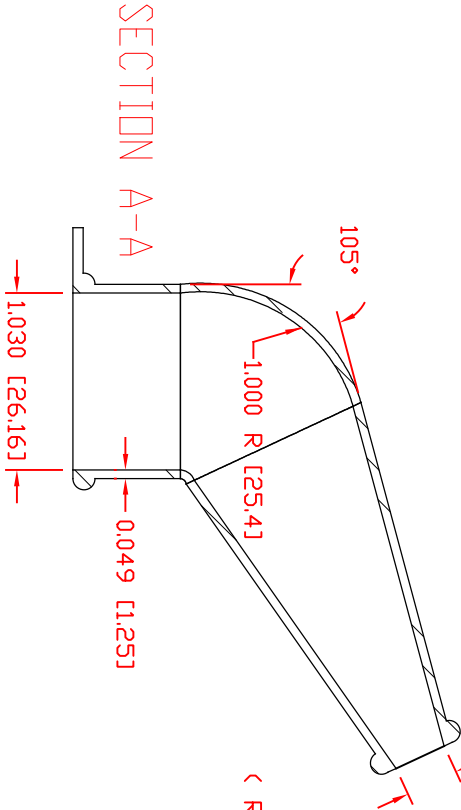
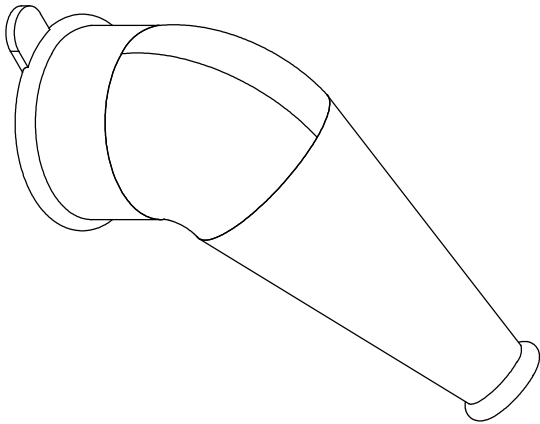
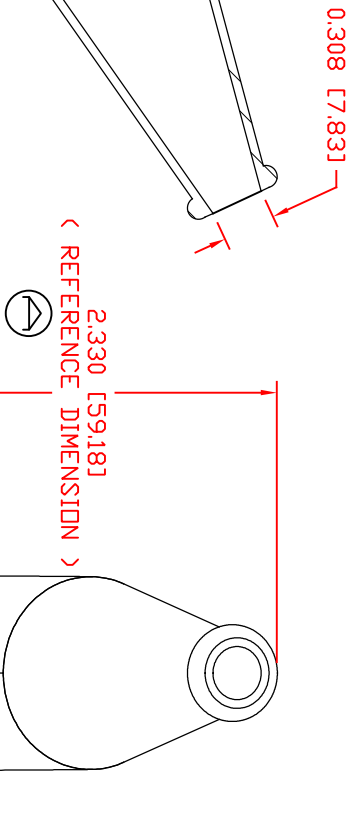


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR	REVISIONS	DATE	INT.
△	UPDATED DIMENSIONS TO (REFERENCE DIMENSION)	2-13-17	RAS
⊖	ADDED ANGULAR TOLERANCE	3-10-17	RAS
⊖	3.225 [81.91] WAS 3.177 [80.69]	11-01-24	RAS

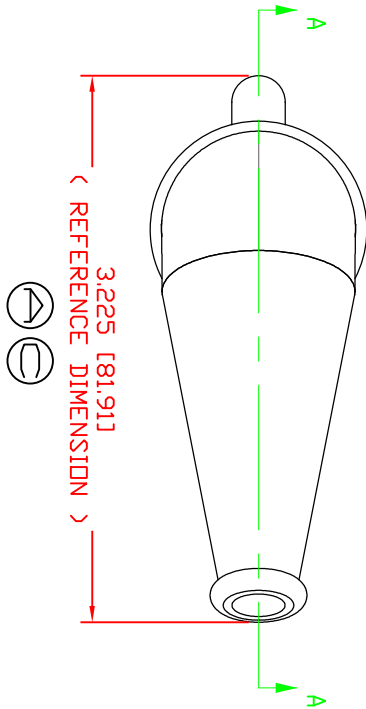

ALL DIMENSIONS GIVEN AS: in [mm]
MOLDED PARTS: ±0.30" [±0.8mm]
HARDWARE ITEMS: ±0.10" [±0.25mm]
ANGULAR DIMENSIONS: ±5°



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY:	RAS	WEIGHT:
CUSTOMER DIMS	12-07-16	CHK'D BY:		.023 LBS [10.53 g]

TITLE: BOOT - HORN SWITCH

MATERIAL:	PVC	PART NO.
COLOR: BLACK	DRG CLASS REV C	530N3V14

VTE PART NO: 1101650114
MATERIAL: PVC
VENDOR PART NO: 9812-65-BLACK
SHORE DUREMETER: "A" 10 SEC. 65
SPECIFIC GRAVITY: 1.34
ULT. ELONGATION %: 400
MELTING TEMP: 315-335 F [157-168 C]
BRITTLE TEMP: -54 F [-48 C]
Tensile Strength PSI: 1550 PSI
Dielectric Strength, v./mil: 453
UL Rating: V2

DO NOT SCALE