
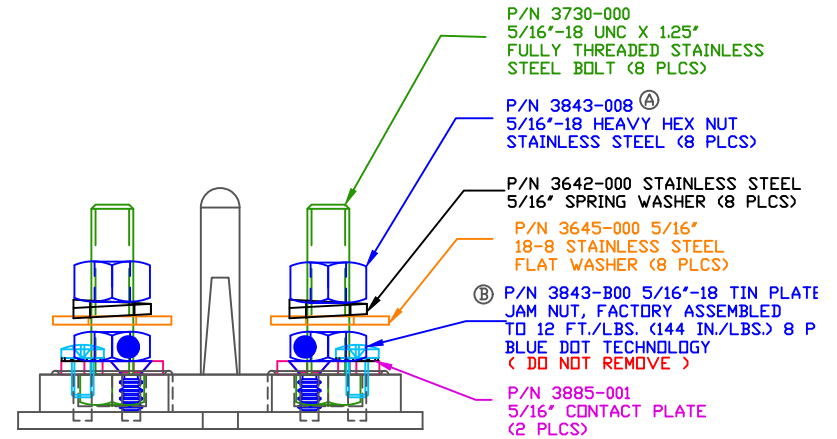
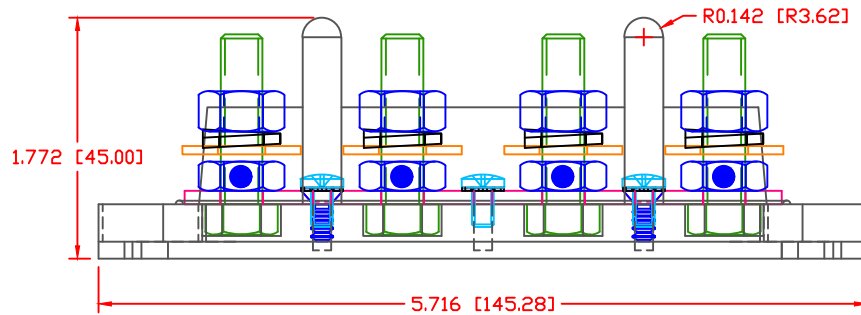


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	REPLACED P/N 3843-002 WITH P/N 3843-008	3-28-16	RAS
B	3843-B00 WAS 3843-000	06-13-17	JMM
C	ADDED NEWTON METERS VALUE TO TORQUE SPEC	11-16-17	RAS

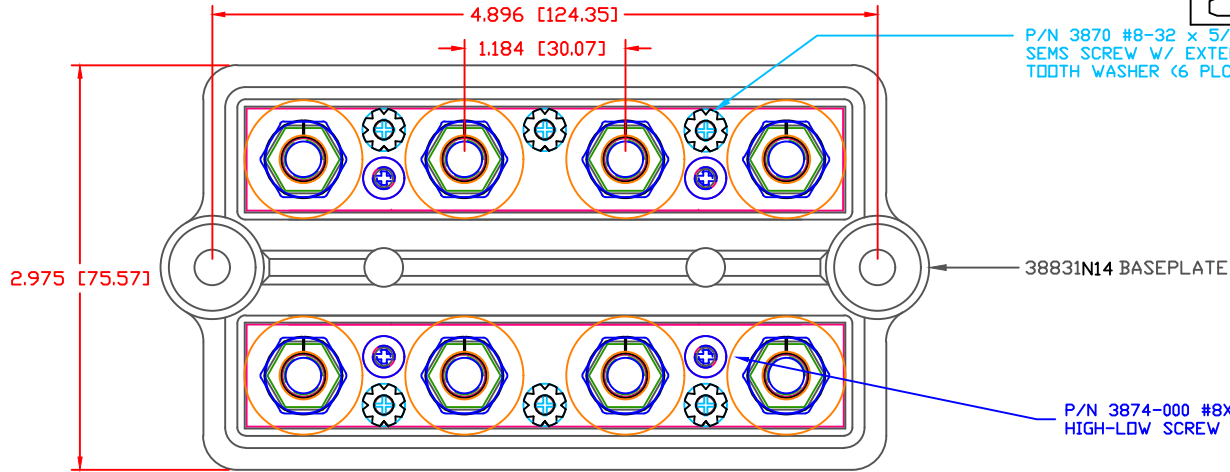


ALL DIMENSIONS GIVEN AS: in [mm]  
 MOLDED PARTS: ±.030" [±0.8mm]  
 HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO: 111210514UL  
 MATERIAL: GLASS FILLED NYLON  
 VENDOR PART NO: HYLON N2015 HL BK  
 SPECIFIC GRAVITY: 1.23  
 MELTING TEMP: 515 F [268 C]  
 U.L. RATING: UL 94 HB

MAX RECOMMENDED FASTENER TORQUE: 5/16" STUDS: 144 IN./LBS. [16.2 Nm]  
 ( ANTI-SEIZE RECOMMENDED )

MAX RECOMMENDED CURRENT: 250 AMPS TOTAL @ 12 VDC



VTE Incorporated  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

REF: CUSTOMER DIMS	DATE: 05-03-10	DRN BY: BRH	WEIGHT:
TITLE: 5/16" DUAL 4- POINT BUS BAR SPECIAL FOR ELIMEC		CHK'D BY: BRH	
MATERIAL: GLASS FILLED NYLON	PART NO. 738831N0N14X		
COLOR: BLACK	DRG CLASS REV C		