




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

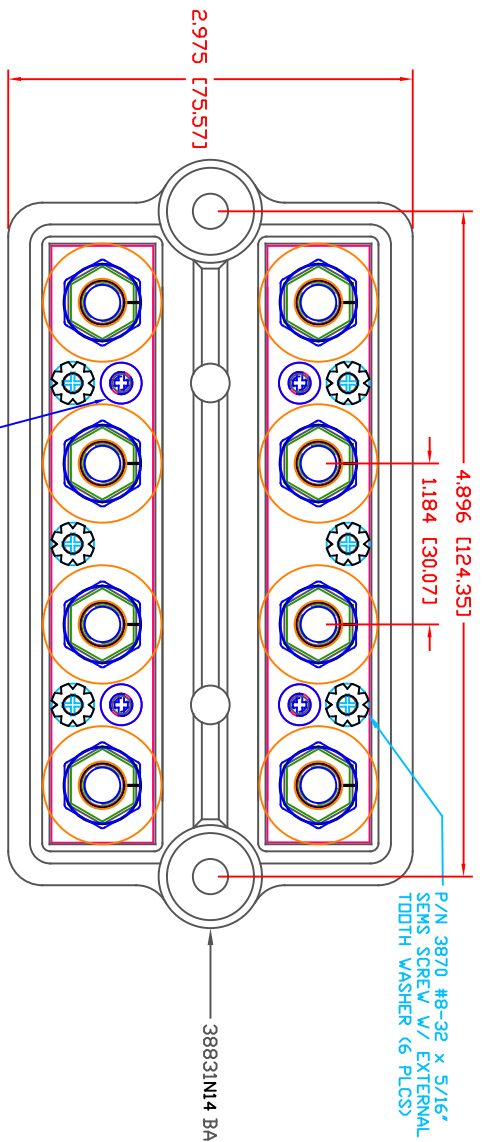

P/N 3874-000 #8X 3/8" PHILLIPS FLAT HEAD HIGH-LOD SCREW STAINLESS STEEL (4 PLCS) * FACTORY ASSEMBLED TO 8 IN./LBS. ⓔ

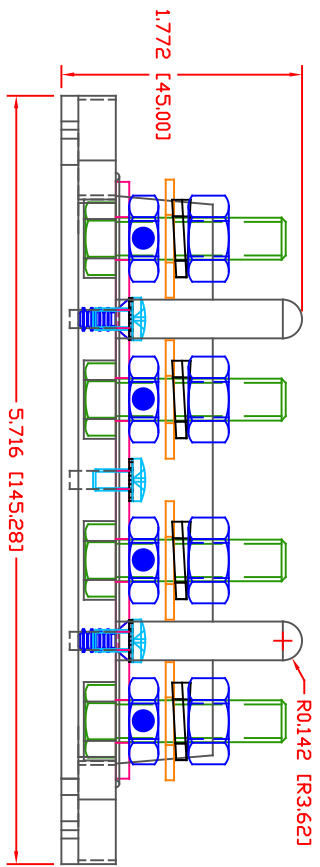

LR	REVISIONS	DATE	INT.
A	REPLACED P/N 3843-002 WITH P/N 3843-008	03-28-16	RAS
B	3843-B00 WAS 3843-000	06-13-17	JMM
C	ADDED NEWTON METERS VALUE TO TORQUE SPEC	11-16-17	RAS
D	ADDED FACTORY TORQUE SPEC TO 3874-000	05-23-24	RAS
E	REVISED TORQUE SPEC FROM 10 IN./LBS.	11-13-24	RAS

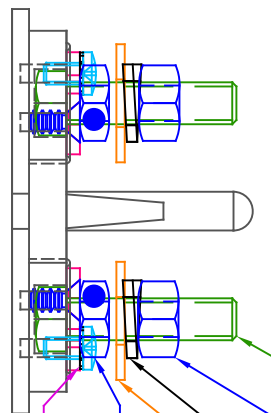

P/N 3730-000 5/16"-18 UNC X 1.25" FULLY THREADED STAINLESS STEEL BOLT (8 PLCS)
P/N 3843-008 ⓐ 5/16"-18 HEAVY HEX NUT STAINLESS STEEL (8 PLCS)
P/N 3642-000 STAINLESS STEEL 5/16" SPRING WASHER (8 PLCS)
P/N 3645-000 5/16" 18-8 STAINLESS STEEL FLAT WASHER (8 PLCS)
P/N 3843-B00 5/16"-18 TIN PLATE JAM NUT, FACTORY ASSEMBLED TO 12 FT./LBS. (144 IN./LBS.) 8 P BLUE DOT TECHNOLOGY (DO NOT REMOVE)
P/N 3885-001 5/16" CONTACT PLATE (2 PLCS)

ALL DIMENSIONS GIVEN AS: In [mm]
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO: 111210514UL
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL BK
SPECIFIC GRAVITY: 1.23
MELTING TEMP: 515 F [268 C]
UL RATING: UL 94 HB

MAX RECOMMENDED FASTENER TORQUE: 5/16" STUDS: 144 IN./LBS. [16.2 Nm]
< ANTI-SEIZE RECOMMENDED >

MAX RECOMMENDED CURRENT: 250 AMPS TOTAL @ 12 VDC



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	05-03-10	CHK'D BY:	BRH	
TITLE:	5/16" DUAL 4-POINT BUS BAR SPECIAL FOR ELIMEC			
MATERIAL:	GLASS FILLED NYLON	PART NO:	738831N0N14X	
COLOR:	BLACK	DRG CLASS	REV E	