

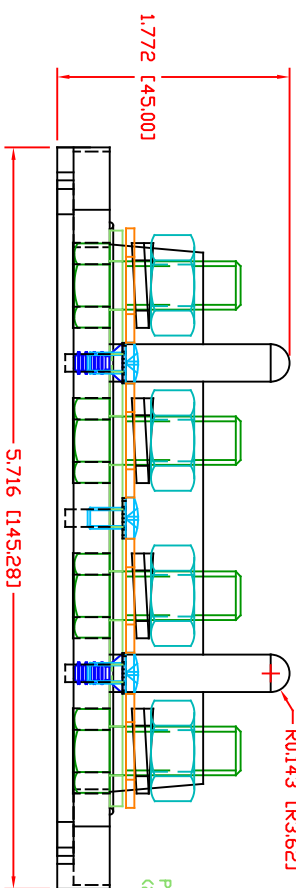


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

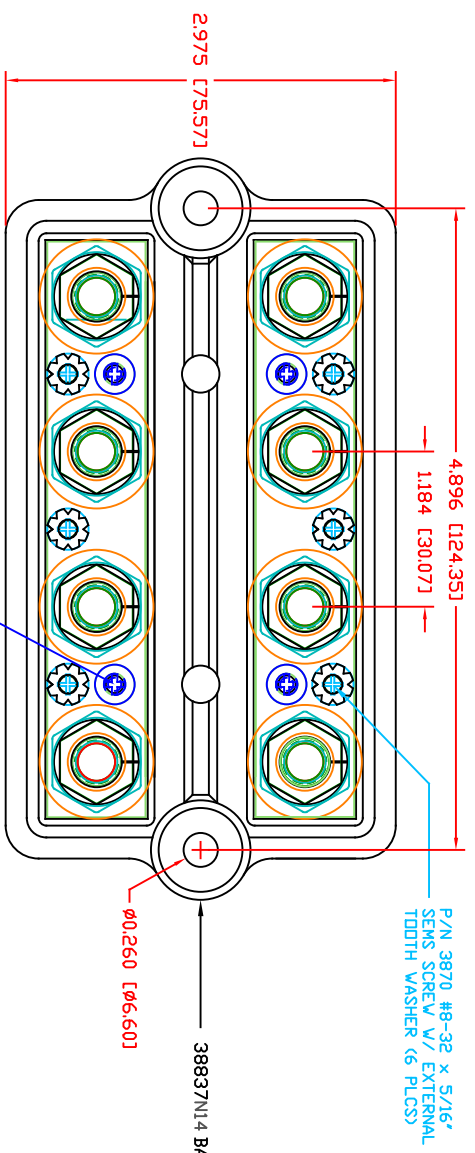

LR	REVISIONS	DATE	INT.
A	ADDED FULL RADIUS FOR COVER RETAINER POSTS	01-10-07	BRH
B	ADDED RED PAINT FOR POLARITY ID		
B	REPLACED P/N 3844-002 WITH P/N 3844-009	03-18-16	RAS
C	POLARITY PAINT REMOVED FROM BOLT END	06-12-17	JMM
D	ADDED NEWTON METERS VALUE TO TORQUE SPEC	11-16-17	RAS
E	ADDED FACTORY TORQUE SPEC TO 3874-000	5-23-24	RAS
F	REVISED TORQUE SPEC FROM 10 IN./LBS.	11-13-24	RAS

P/N 738N3P05 COVER ASSEMBLY  
(AVAILABLE SEPARATELY)  
CONSISTS OF (1) 338N9V COVER AND  
(2) 324N3V05 COVER RETAINERS

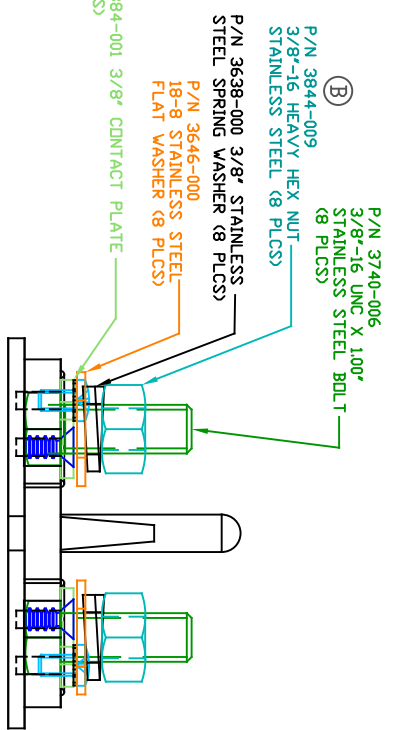


SCALE FACTOR : NONE  
ALL DIMENSIONS GIVEN AS: In. [mm]  
TOLERANCES UNLESS OTHERWISE SPECIFIED :  
MOLDED PARTS: ±.030" [±0.8mm]  
HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO: 111210514UL  
MATERIAL: GLASS FILLED NYLON  
VENDOR PART NO: HYLON N2015 HL BK  
SPECIFIC GRAVITY: 1.23  
MELTING TEMP: 515 F [268 C]  
UL RATING: 94 HB

MAX RECOMMENDED FASTENER TORQUE: 180 IN./LBS [20.3 Nm]  
< ANTI-SEIZE RECOMMENDED >

CURRENT RATING: 250A @ 12VDC  
BASE MATERIAL: GLASS-REINFORCED NYLON  
BASE MATERIAL U.L. RATING: 94 HB



VTE Incorporated  
5437 Robinson Road, P.O. Box 790  
Pellston, Michigan 49769  
Telephone: 1-800-527-9256, 231-539-8000  
FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	10-24-06	CHK'D BY:	BRH	
TITLE: 3/8" DUAL 4- POINT BUS BAR				
MATERIAL: GLASS FILLED NYLON	PART NO:		738837N0N14	
COLOR: BLACK	DRG CLASS	REV	F	