
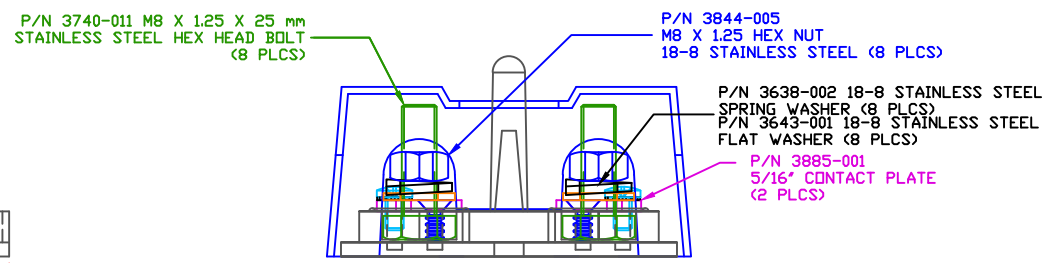
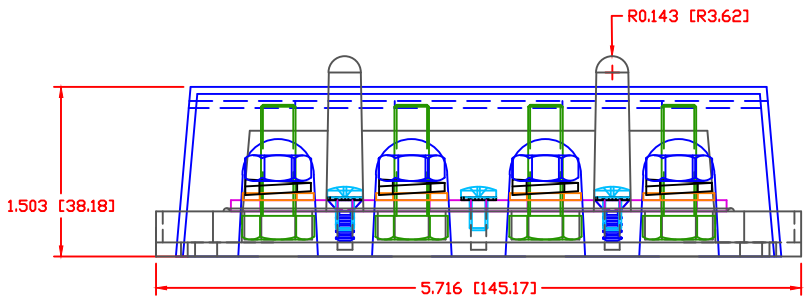


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
△	ADDED NEWTON METERS VALUE TO TORQUE SPEC	11-16-17	RAS

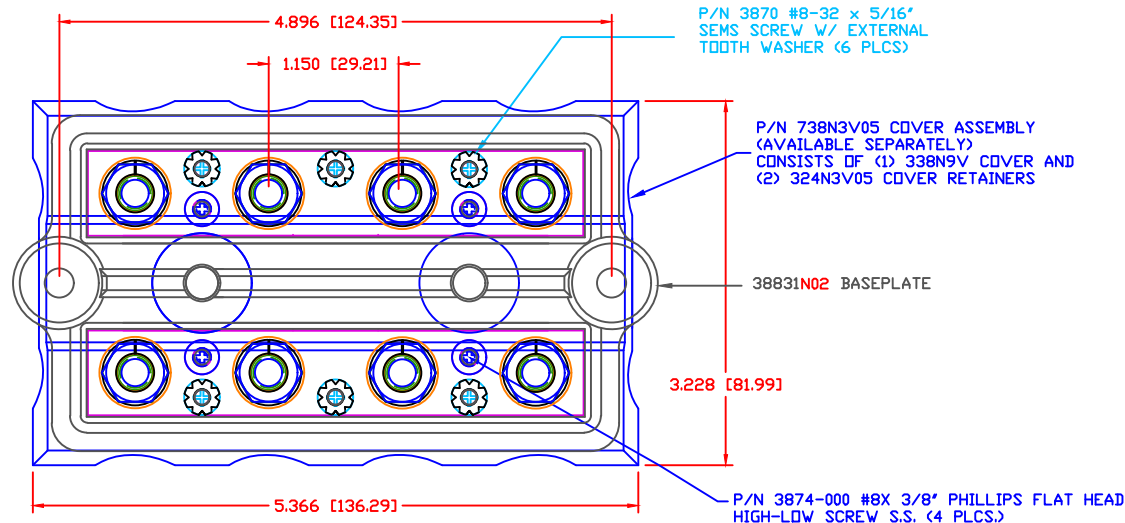

ALL DIMENSIONS GIVEN AS: in [mm]
 MOLDED PARTS: ±.030" [±0.8mm]
 HARDWARE ITEMS: ±.010" [±0.25mm]

PART NO: 7111210502
 MATERIAL: GLASS FILLED NYLON
 MATERIAL PART NO: DURETHANE BKV 15 H 3.0 000000
 SPECIFIC GRAVITY: 1.23
 MELTING POINT DEGREES C: 213
 MELTING POINT DEGREES F: 415

#8 SCREWS FACTORY INSTALLED TO 15 IN.-LBS
 MAX RECOMMENDED FASTENER TORQUE: M8X1.25 NUTS 144 IN./LBS. [16.2 Nm]
 MAX RECOMMENDED CURRENT: 250A @ 12VDC



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	12-21-08	CHK'D BY:	BRH	
TITLE: M8 METRIC DUAL 4- POINT BUS BAR				
MATERIAL: GLASS FILLED NYLON			PART NO.	
COLOR: RED			7388M8N0N02	
DRG CLASS REV A				