
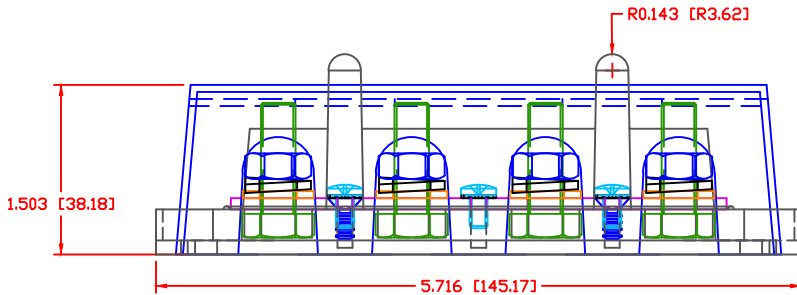


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
△	ADDED NEWTON METERS VALUE TO TORQUE SPEC	11-16-17	RAS

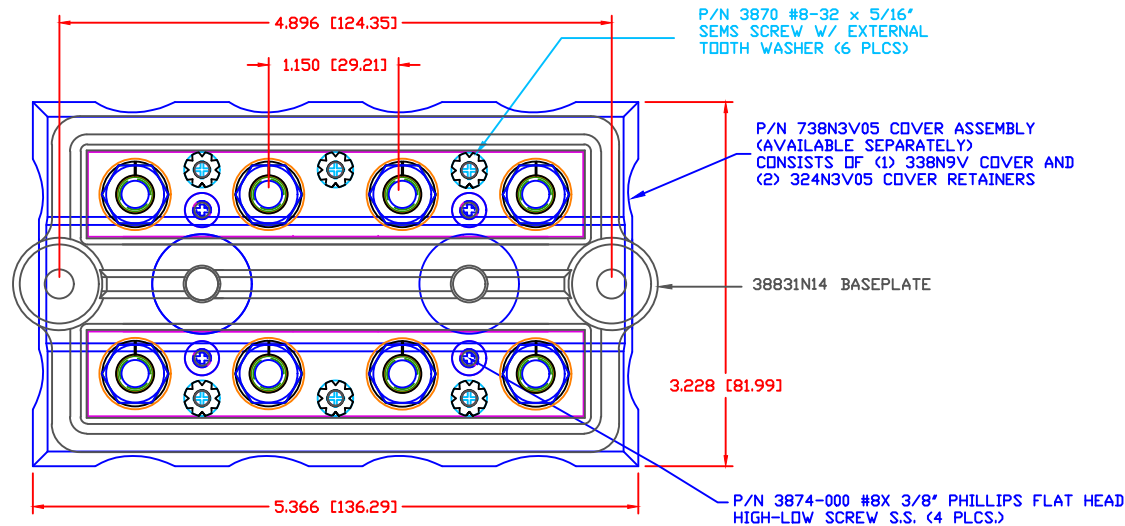

P/N 3740-011 M8 X 1.25 X 25 mm  
STAINLESS STEEL HEX HEAD BOLT  
(8 PLCS)

P/N 3844-005  
M8 X 1.25 HEX NUT  
18-8 STAINLESS STEEL (8 PLCS)

P/N 3638-002 18-8 STAINLESS STEEL  
SPRING WASHER (8 PLCS)  
P/N 3643-001 18-8 STAINLESS STEEL  
FLAT WASHER (8 PLCS)

P/N 3885-001  
5/16\"/>

ALL DIMENSIONS GIVEN AS: in [mm]  
MOLDED PARTS: ±.030\"/>



VTE Incorporated

5437 Robinson Road, P.O. Box 790  
Pellston, Michigan 49769  
Telephone: 1-800-527-9256, 231-539-8000  
FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	12-21-08	CHK'D BY:	BRH	
TITLE: M8 METRIC DUAL 4- POINT BUS BAR				
MATERIAL: GLASS FILLED NYLON			PART NO.	
COLOR: BLACK			7388M8N0N14	
DRG CLASS REV A				

VTE PART NO: 111210514UL  
MATERIAL: GLASS FILLED NYLON  
VENDOR PART NO: DURETHANE BKV 15 H 2.0 901510  
SPECIFIC GRAVITY: 1.23  
MELTING TEMP: 415 F [213 C]  
U.L. RATING: UL 94 HB

#8 SCREWS FACTORY INSTALLED TO 15 IN-LBS  
MAX RECOMMENDED FASTENER TORQUE: M8X1.25 NUTS 144 IN./LBS. [16.2 Nm]  
MAX RECOMMENDED CURRENT: 250A @ 12VDC