


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

P/N 3874-000 PHILLIPS FLAT HEAD 8-32 x 3/8" HIGH-LOW SCREW STAINLESS STEEL (2 PLCS) \* FACTORY ASSEMBLED TO 8 IN./LBS.

METRIC IDENTIFICATION (YELLOW DOT) 4 PLCS.

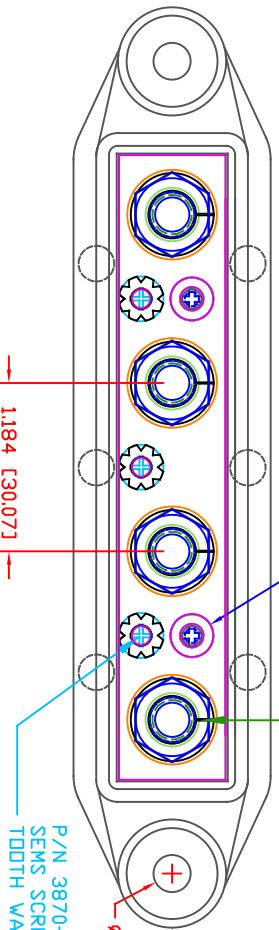

P/N 3870-000 8-32 x 5/16" SEMS SCREW W/ EXTERNAL TOOTH WASHER (3 PLCS)

344008N14 BASEPLATE



P/N 3731-001 M8 x 1.25 x 30 FULLY THREADED STAINLESS STEEL BOLT (4 PLCS)

P/N 3846-000 M8 x 1.25 HEAVY JAM NUT 18-8 STAINLESS STEEL (4 PLCS)

P/N 3638-002 18-8 STAINLESS STEEL SPRING WASHER (4 PLCS)

P/N 3643-001 18-8 STAINLESS STEEL FLAT WASHER (4 PLCS)

P/N 3885-001 5/16" CONNECTION PLATE

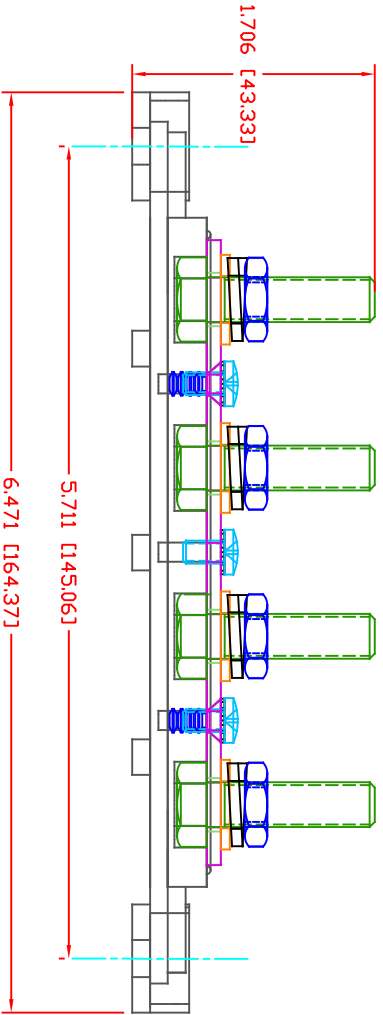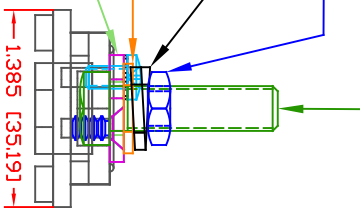


SCALE FACTOR : NONE  
ALL DIMENSIONS GIVEN AS: in [mm]  
TOLERANCES UNLESS OTHERWISE SPECIFIED :  
MOLDED PARTS: ±0.30" [±0.8mm]  
HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO: 111210514UL  
MATERIAL: GLASS FILLED NYLON  
VENDOR PART NO: HYLON N2015 HL BK  
SPECIFIC GRAVITY: 1.23  
MELTING TEMP: 515 F [268 C]  
UL RATING: UL 94 HB

MAXIMUM RECOMMENDED FASTENER TORQUE: (144 IN./LBS.) [16.2 Nm] ( ANTI-SEIZE RECOMMENDED )

MAXIMUM RECOMMENDED AMPERAGE: 250 AMPS @ 12VDC

| LTR | REVISIONS                             | DATE     | INT. |
|-----|---------------------------------------|----------|------|
| A   | ADDED METRIC IDENTIFICATION METHOD    | 05APR11  | BRH  |
| B   | REMOVED BLUE DOT INSTRUCTION          | 21OCT15  | RAS  |
| C   | UPDATED DIMENSIONS AND DESCRIPTIONS   | 02FEB16  | RAS  |
| D   | UPDATED CURRENT RATING                | 02JUN16  | RAS  |
| E   | UPDATED MAXIMUM AMPERAGE RATING       | 30JAN17  | RAS  |
| F   | ADDED FACTORY TORQUE SPEC TO 3874-000 | 5-23-24  | RAS  |
| G   | REVISED TORQUE SPEC FROM 10 IN./LBS.  | 11-13-24 | RAS  |



VTE Incorporated  
5437 Robinson Road, P.O. Box 790  
Pellston, Michigan 49769  
Telephone: 1-800-527-9256, 231-539-8000  
FAX: 231-539-0914

| REF.          | DATE                | DRN BY:   | BRH        | WEIGHT: |
|---------------|---------------------|-----------|------------|---------|
| CUSTOMER DIMS | 06-03-10            | CHK'D BY: | BRH        |         |
| TITLE:        | BUSBAR, 4 POINT, M8 |           | SCALE:     | NONE    |
| MATERIAL:     | GLASS-FILLED NYLON  | PART NO:  | 74008N0N14 |         |
| COLOR:        | BLACK               | DRG CLASS | REV G      |         |