THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

REMOVED BLUE DOT INSTRUCTION


10-21-15 DATE

RAS RAS

RAS RAS

R P S RAS RAS Z T

REVISIONS

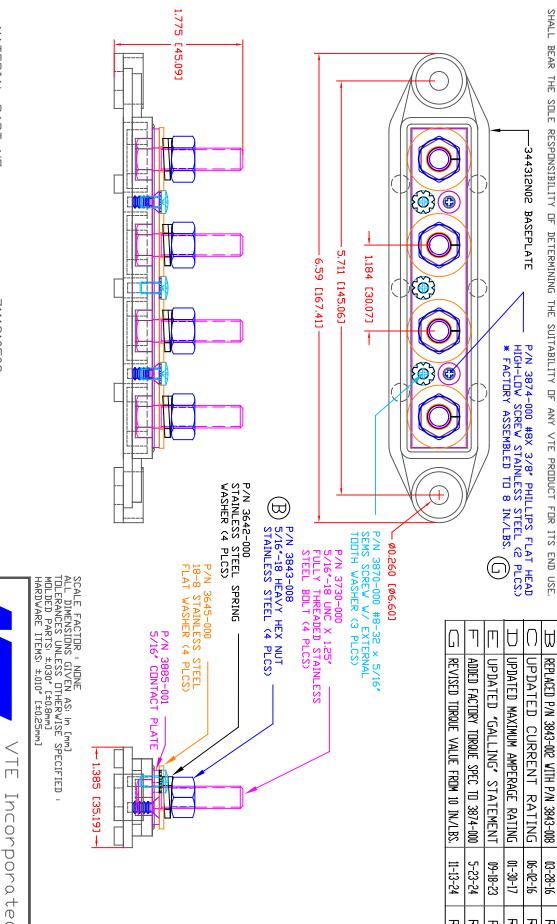

MATERIAL: PART MATERIAL: VENDOR PART I SPECIFIC GRAV MELTING TEMP:

7111210502 GLASS FILLED NY HYLON N2015 HL 1.23 515 F (268 C) UL 94 HB

ILLED NYLON

NAT

REF.

DATE:

Pellston, Michigan 49769 5437 Robinson Road, P.D.

Box 790

Telephone: 1-800-527-9256,

231-539-8000

FAX: 231-539-0914

CUSTOMER

DIMS

06-03-10

CHK'D BY: DRN BY:

BRH BRY

WEIGHT:

BUSBAR, 4 POINT,

5/16"

SCALE:

PART ND:

TING TEI

MAXIMUM RECOMMENDED

AMPERAGE

WARRANTED,

DIELECTRIC

GREASE CAN

踞

USED 250

TO PREVENT GALLING>

MATERIAL: GLASS-FILLED NYLON

PART

AMPS

Ø

12VDC

CULUR

RED

CLASS

۵

4312N0N02

12

FT./LBS. (144 IN./LBS.)

TITLE

MAXIMUM RECOMMENDED FASTENER TORQUE: