


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.



LTR.	REVISIONS	DATE	INT
△	ASSEMBLY OBSOLETE 7-31-17	8-28-17	RAS

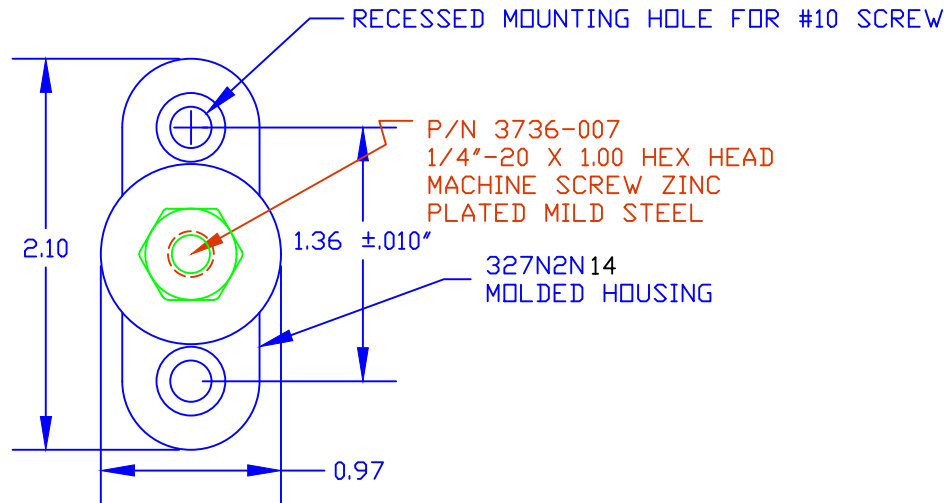

P/N 3736-007
1/4"-20 X 1.00 HEX HEAD
MACHINE SCREW ZINC
PLATED MILD STEEL

DO NOT
SCALE

P/N 3842-004 1/4"-20 ZINC PLATED
MILD STEEL HEAVY HEX JAM NUT
BOTTOM NUT FACTORY INSTALLED TO
72 IN./LBS.

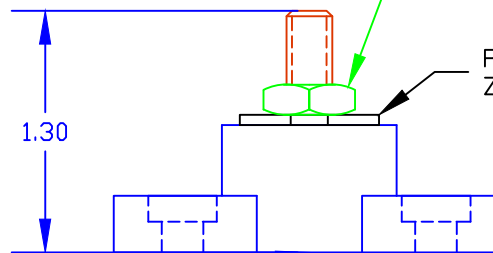

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
 BASE MATERIAL U.L. RATING: 94 HB
 DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
 CURRENT RATING: 165 AMPS
 TEMP. RISE AT LOAD: 52 DEG. F.
 MAXIMUM RECOMMENDED TORQUE: 60 IN./LBS.



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
***	12APR13	CHK'D BY:	BRH	***
TITLE: 1/4" SMALL JUNCTION STUD ECONOMY VERSION SPECIAL SHORTER LENGTH FOR ENDRIES				SCALE:
MATERIAL:			PART NO.	
COLOR: BLACK	DRG CLASS	*****	77025E N14 X1	