




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	1.55" WAS 1.80", 3736-000 WAS 3736-005	9-13-13	BRH
B	REDUCED FROM QTY OF 2	1-25-16	RAS
C	PN 329N0N14 CHANGED TO 329N0N14	6-23-16	MDL
D	3842-006 WAS 3842-003	3-24-17	JMM
E	UPDATED AND ADDED DIMENSIONS FOR MOUNTING	7-31-17	RAS
F	REPLACED CURRENT LIMITS WITH TEMPERATURE LIMIT	10-12-18	RAS

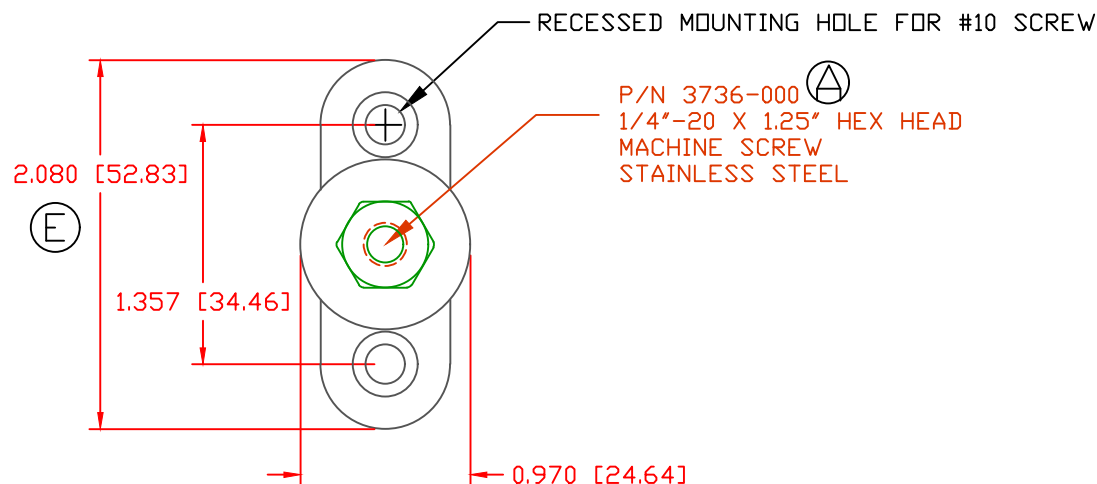

327N2N14
MOLDED HOUSING

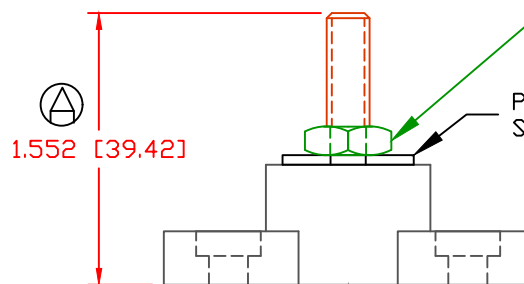

329N0N14
CAVITY PLUG

(B) (D)
P/N 3842-006 1/4"-20 STAINLESS
STEEL HEAVY HEX JAM NUT,
BOTTOM NUT FACTORY
INSTALLED TO 72 IN./LBS.
(DO NOT REMOVE)
P/N 3644-000 1/4" X .055" X .750"
STAINLESS STEEL FLAT WASHER

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP:
U.L. RATING:

1111210514UL
GLASS FILLED NYLON
HYLON N2015 HL BK
1.23
515 F [268 C]
UL 94 HB

(F) OVERALL ASSEMBLY TEMPERATURE NOT TO EXCEED 140 DEGREES F
(60 DEGREES C)

MAXIMUM RECOMMENDED TORQUE: 60 IN./LBS.

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY:	WEIGHT:
770 SERIES	5-03-13	BRH	
TITLE:		CHK'D BY:	SCALE:
1/4" SMALL JUNCTION STUD SPECIAL FOR ENDRIES 1.25" BOLT LENGTH		BRH	NONE
MATERIAL:		PART NO.	
COLOR: BLACK		77025N14X1	
DRG CLASS		REV F	