
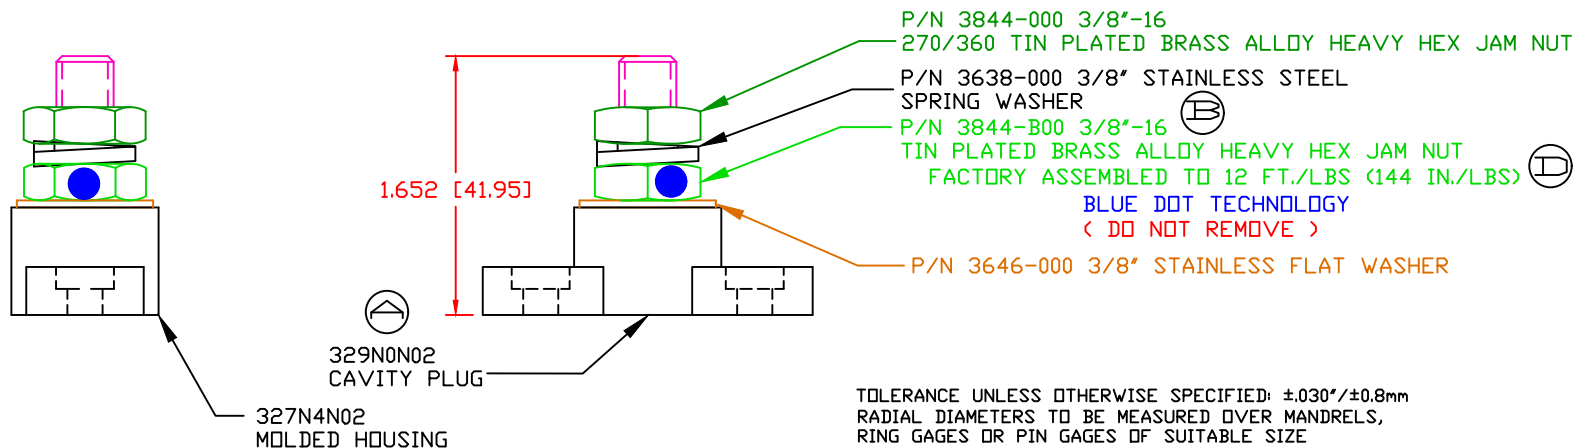


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	PN 329NDV** CHANGED TO 329NDN**	6-23-16	MDL
B	UPDATED PART # FROM 3844-000	06-01-17	RAS
C	UPDATED AND ADDED DIMENSIONS FOR MOUNTING	7-31-17	RAS
D	TORQUE VALUE CHANGED FROM 15 FT LBS	09-16-20	EJE

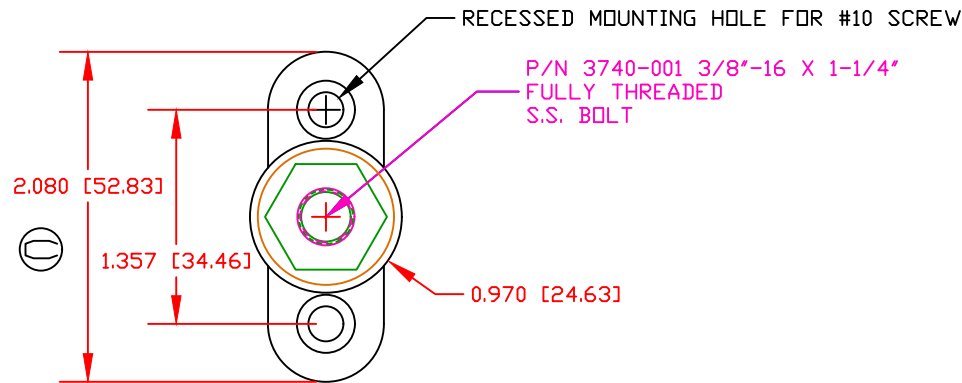

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.030"/\pm 0.8mm$
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
 BASE MATERIAL U.L. RATING: 94 HB
 DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
 VOLTAGE RATING: 48 VDC MAX.
 CURRENT RATING: 250 AMPS @ 12 VDC
 TEMP. RISE AT LOAD: 52 DEG. F.
 RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

DO NOT SCALE

				VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY:	RAS	WEIGHT:	
	09APR03	CHK'D BY:	EJE		
TITLE:	3/8" SMALL JUNCTION POST			SCALE:	NONE
MATERIAL:	GLASS FILLED NYLON		PART NO.		
COLOR:	RED	DRG CLASS	REV D	77037N02X	