
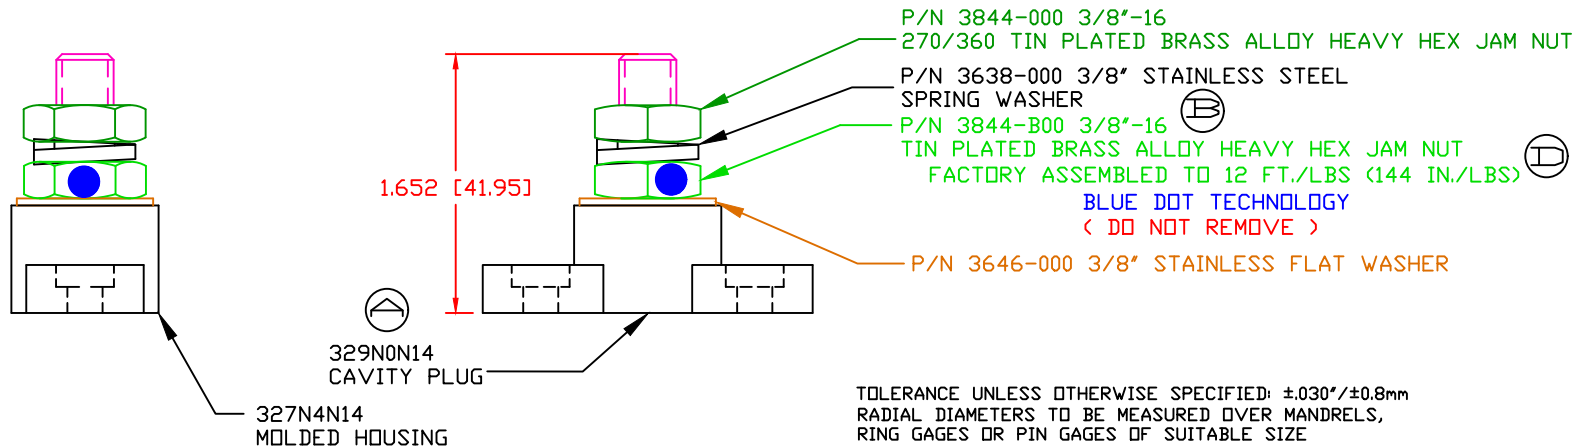



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	PN 329NDV** CHANGED TO 329NDN**	6-23-16	MDL
B	UPDATED PART # FROM 3844-000	06-01-17	RAS
C	UPDATED AND ADDED DIMENSIONS FOR MOUNTING	7-31-17	RAS
D	TORQUE VALUE CHANGED FROM 15 FT LBS	09-16-20	EJE

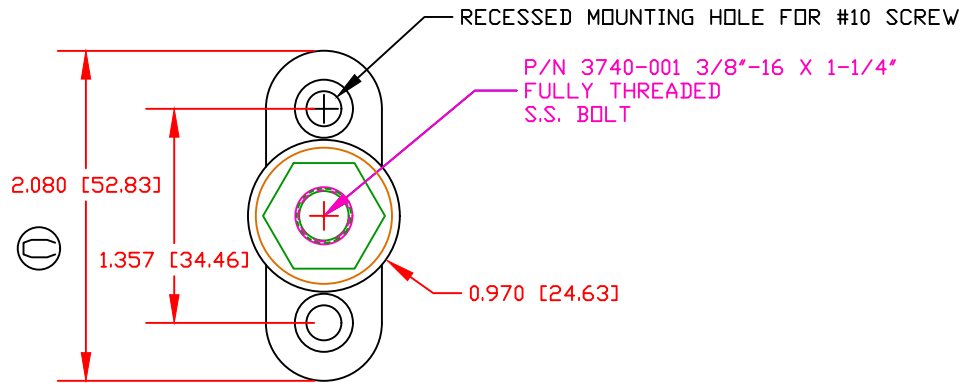

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm  
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON  
 BASE MATERIAL U.L. RATING: 94 HB  
 DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149  
 CURRENT RATING: 250 AMPS  
 TEMP. RISE AT LOAD: 46 DEG. F.  
 RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)



VTE Incorporated  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

REF:	DATE: 09APR03	DRN BY: RAS CHK'D BY: EJE	WEIGHT:
TITLE: 3/8" SMALL JUNCTION POST			SCALE: NONE
MATERIAL: GLASS FILLED NYLON		PART NO. 77037N14X	
COLOR: BLACK	DRG CLASS REV D		

DO NOT SCALE