
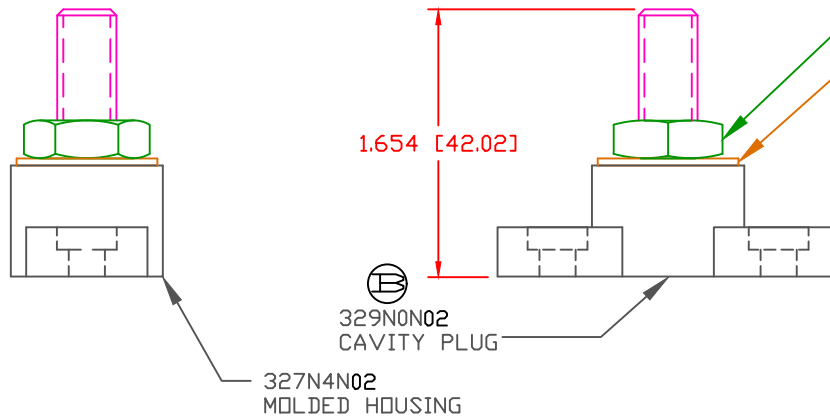


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.


LTR.	REVISIONS	DATE	INT.
A	REMOVED OPTIONAL CONSTRUCTION NOTE	4-15-16	RAS
B	PN 329NOV** CHANGED TO 329NON**	6-23-16	MDL
C	3844-012 WAS 3844-009	11-01-16	JMM
D	UPDATED AND ADDED DIMENSIONS FOR MOUNTING	7-31-17	RAS

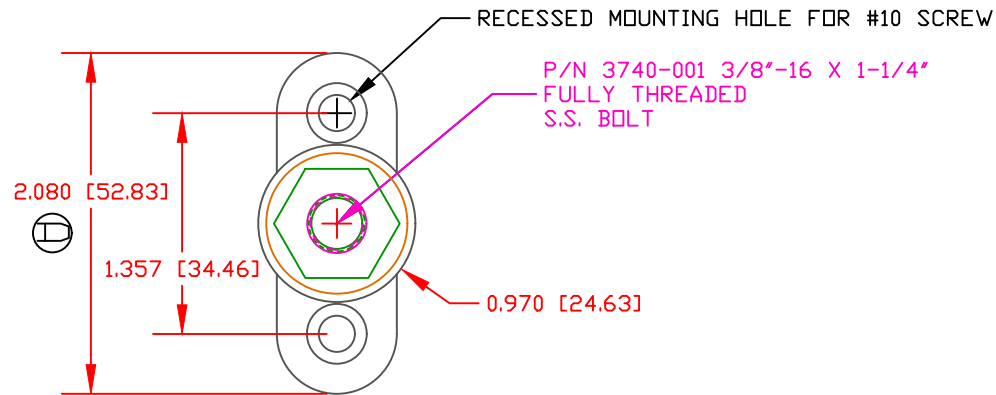

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.30\%$ / $\pm 0.8\text{mm}$
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
 BASE MATERIAL U.L. RATING: 94 HB
 DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
 CURRENT RATING: 250 AMPS
 TEMP. RISE AT LOAD: 52 DEG. F.
 RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

DO NOT SCALE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914			
		REF:	DATE:	DRN BY:	BRH
	09FEB07	CHK'D BY:	BRH		
TITLE: 3/8" SMALL POWER POST ECONOMY VERSION				SCALE: NONE	
MATERIAL:			PART NO.		
COLOR: RED	DRG CLASS	REV D	77037XN02		