

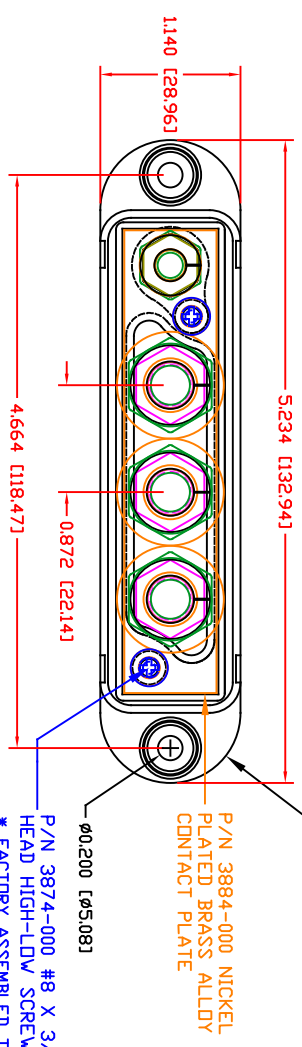


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

P/N 31225N02 BASEPLATE
MATERIAL: 16% GLASS FILLED NYLON
(RED AND BLACK VERSIONS)

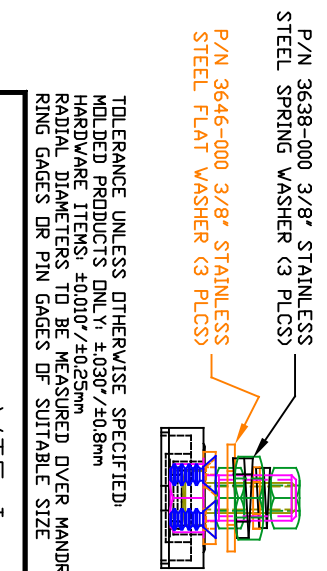


LTR	REVISIONS	DATE	INT.
A	3844-003 WAS 3844	06-16-06	BRH
B	3874-000 WAS 3873-000	07-12-06	BRH
C	3842-001 WAS 3842-002	08-14-06	BRH
D	REPLACED P/N 3842-002 WITH P/N 3842-005	03-28-06	RAS
E	3844-012 WAS 3844-003	11-01-16	JMM
F	REPLACED P/N 3736-005 WITH 3736-002	2-14-17	RAS
G	3842-B01 WAS 3842-001	06-14-17	JMM
H	ADDED FACTORY TORQUE SPEC TO 3874-000	5-23-24	RAS
I	REVISED TORQUE SPEC FROM 10 IN./LBS.	11-13-24	RAS

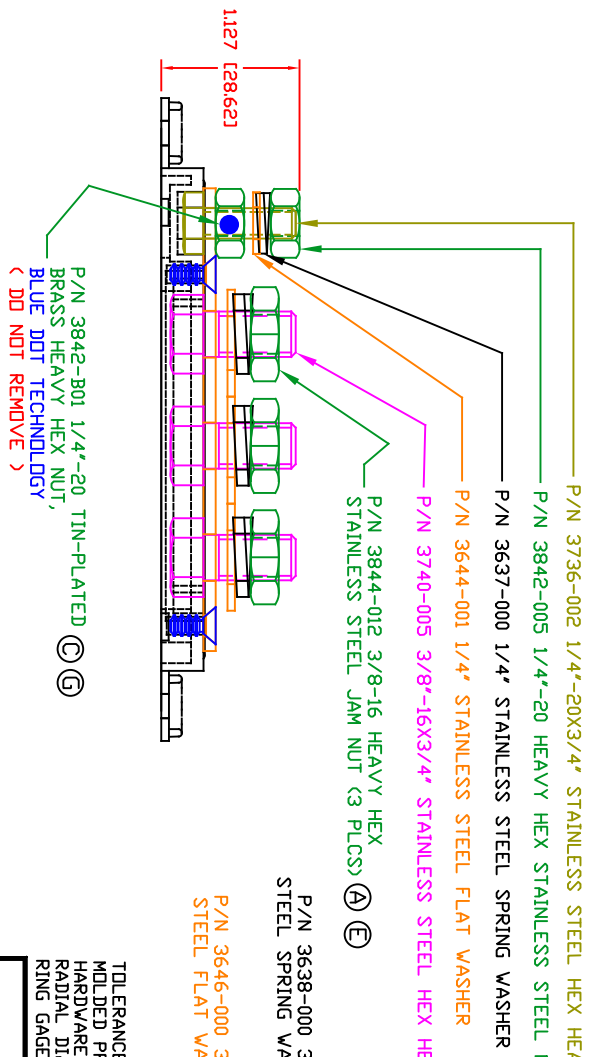

TOLERANCE UNLESS OTHERWISE SPECIFIED:
MOLDED PRODUCTS: DNL Y: ±0.30*/±0.8mm
HARDWARE ITEMS: ±0.010*/±0.25mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

MATERIAL PART NO: 7111210502
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL NAT
SPECIFIC GRAVITY: 1.23
MELTING TEMP: 515 F [268 C]
UL RATING: UL 94 HB

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER
MAXIMUM AMPERAGE: 210 AMPS @12VDC
RECOMMENDED MAX FASTENER TORQUE: 3/8\"-16 - 180 IN./LBS.
1/4\"-20 - 60 IN./LBS.
< ANTI-SEIZE RECOMMENDED >



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	01-20-06	CHK'D BY:	BRH	
TITLE:	3/8\" 4- POINT CONTACT PLATE		SCALE:	
MATERIAL:	GLASS FILLED NYLON	PART NO:	7704N0N02	
COLOR:	RED	DRG CLASS	REV 1	