
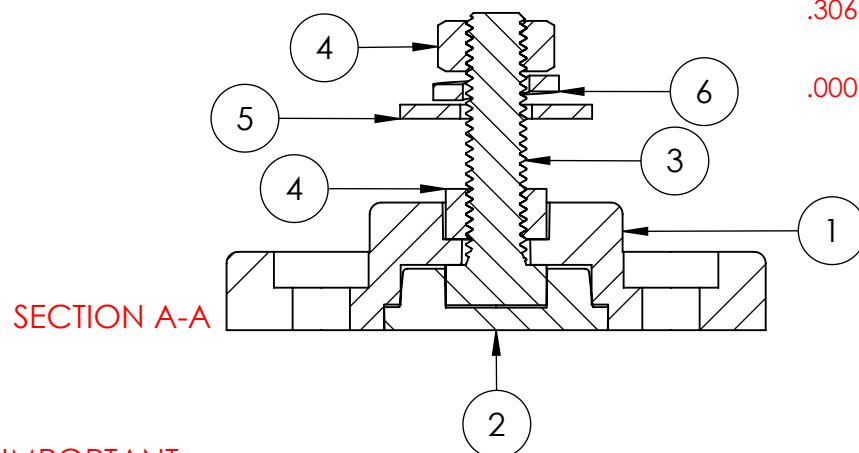
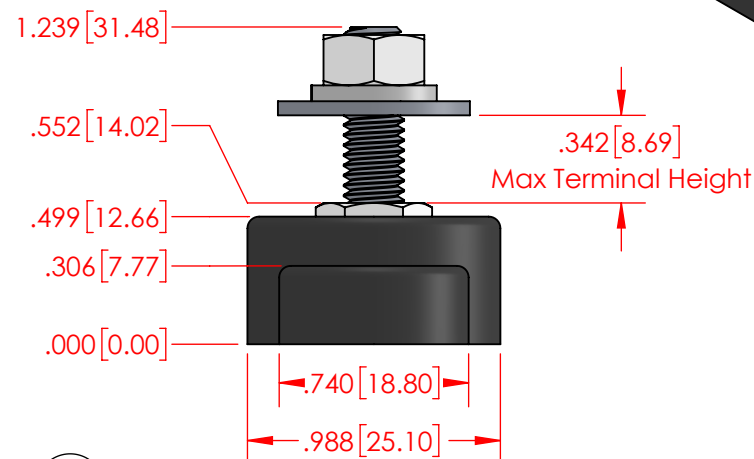
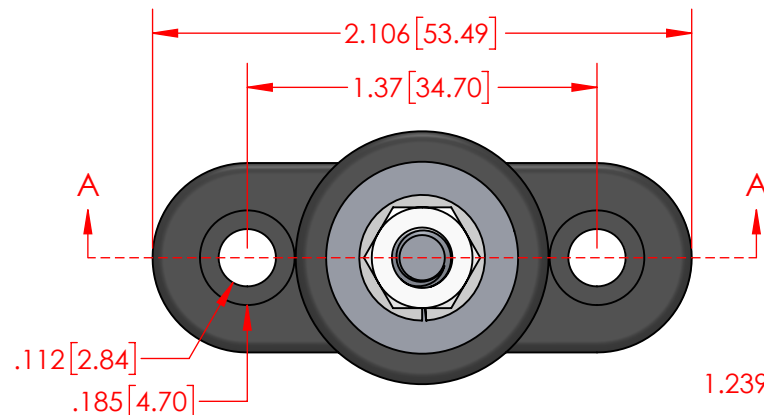


REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
------	-------------	------	----------

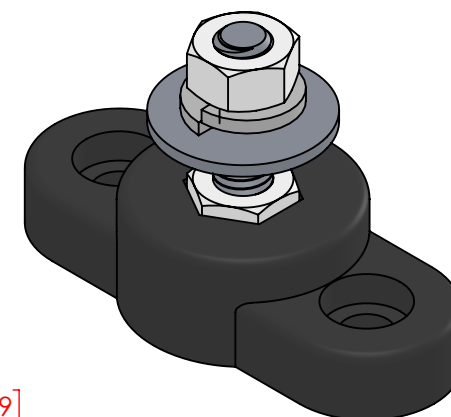

SECTION A-A

IMPORTANT

Amperage ratings are for reference only. Current capacity is determined by the cables used, not the junction post. Current ratings are related to expected cable capacities.

Current Rating : 15 Amp @ 12VDC

MAXIMUM VOLTAGE : 48 VDC

MATERIAL PART NO: 1111210514UL
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: HYLON N2015 HL BK
MAX M6 FASTENER TORQUE: 10 IN./LBS. [1.12 Nm]

Assembly Weight :
0.06 Lbs. [26.4 g]

ALL DIMENSIONS GIVEN AS : INCH [METRIC]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PRODUCTS : $\pm .030$ " / ± 0.8 mm
HARDWARE PRODUCTS : $\pm .010$ " / ± 0.25 mm

PRINTED COPIES ARE NOT CONTROLLED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED PROHIBITED.



VTE INCORPORATED

5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769 USA
Telephone : 1-800-527-9256, 231-539-8000
Fax : 231-539-0914, EFax : 231-344-5914

REV	NAME	DATE
DRAWN BY:	RAS	11-02-23
SIZE	CHECKED BY:	DATE
A	PJK	11-02-23
DO NOT SCALE DRAWING		

TITLE: M6 Low Profile Power Post

DWG. NO. 77306CN14