
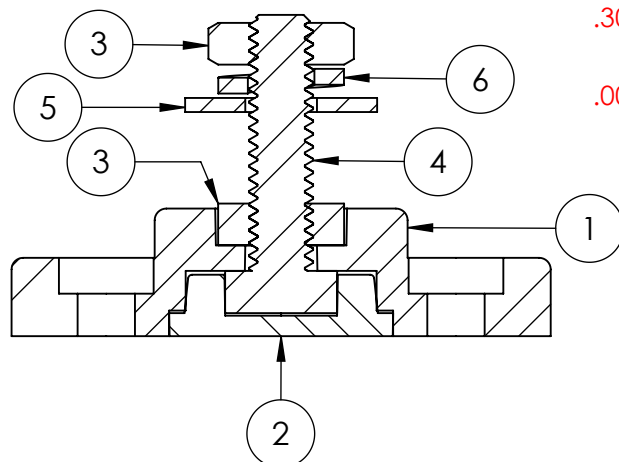
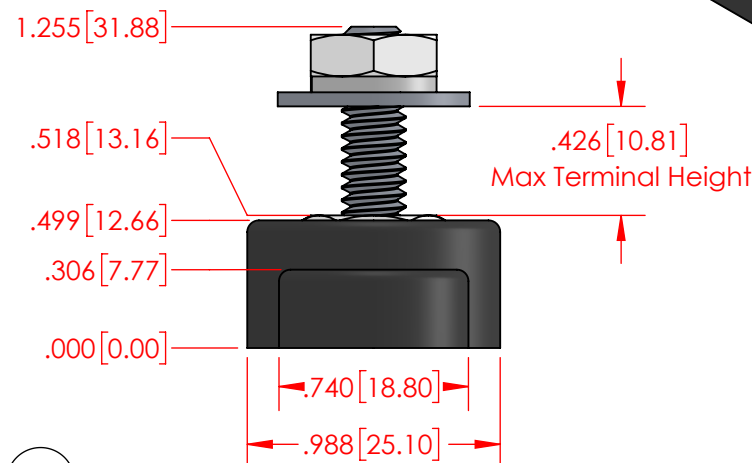
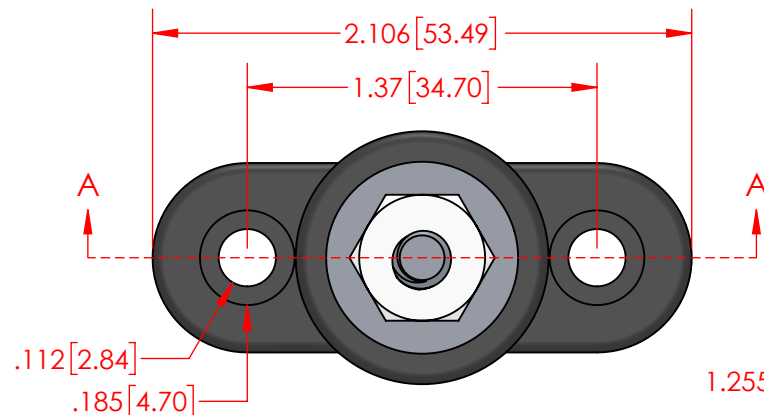


REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
------	-------------	------	----------

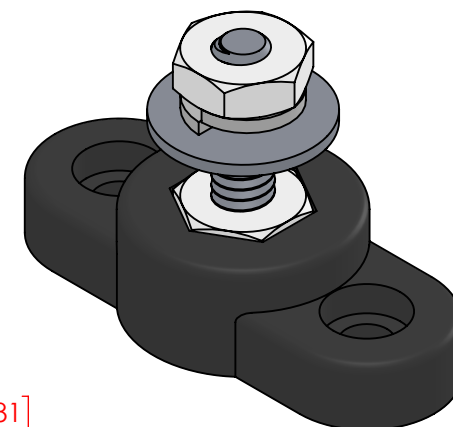

SECTION A-A

IMPORTANT

Amperage ratings are for reference only. Current capacity is determined by the cables used, not the junction post. Current ratings are related to expected cable capacities.

Current Rating : 15 Amp @ 12VDC
 MAXIMUM VOLTAGE : 48 VDC
 MATERIAL PART NO: 1111210514UL
 MATERIAL: GLASS FILLED NYLON
 HYLON N2015 HL BK
 VENDOR PART NO:
 MAX 1/4" FASTENER TORQUE: 60 IN./LBS. [6.77 Nm]

Assembly Weight :
 0.07 Lbs. [29.4 g]

ALL DIMENSIONS GIVEN AS : INCH [METRIC]
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 MOLDED PRODUCTS : $\pm .030$ " / ± 0.8 mm
 HARDWARE PRODUCTS : $\pm .010$ " / ± 0.25 mm

PRINTED COPIES ARE NOT CONTROLLED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED PROHIBITED.



VTE INCORPORATED

5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769 USA
 Telephone : 1-800-527-9256, 231-539-8000
 Fax : 231-539-0914, Efax : 231-344-5914

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	320N3N14	Nylon Power Post Base .250in. (Black)	1
2	337N3N14	Nylon Base Plug .250in. (Black)	1
3	3842-006	1/4"-20 316 Stainless Steel Heavy Hex Jam Nut	2
4	3736-003	1/4"-20 18-8 Stainless Steel Bolt 1"	1
5	3644-000	1/4" 18-8 Stainless Steel Flat Washer	1
6	3637-000	1/4" 18-8 Stainless Steel Lock Washer	1

REV	NAME	DATE
DRAWN BY:	RAS	11-02-23
CHECKED BY:	PJK	11-02-23
SIZE	DO NOT SCALE DRAWING	

TITLE: 1/4" Low Profile Power Post

DWG. NO. 77325CN14