


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.


LTR.	REVISIONS	DATE	INT.
△	ADDED SPACER 330N3N14	19DEC13	BRH
Ⓑ	ADDED FASTENER TORQUE SPEC	03-27-17	JMM

VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

USE GREENLEE
PUNCH ASSEMBLY
#60098 FOR PANEL
CUTOUT

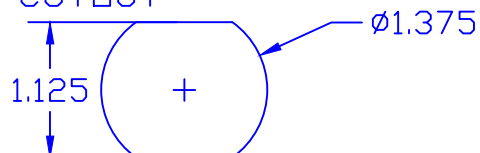

ASSEMBLY #7A373214

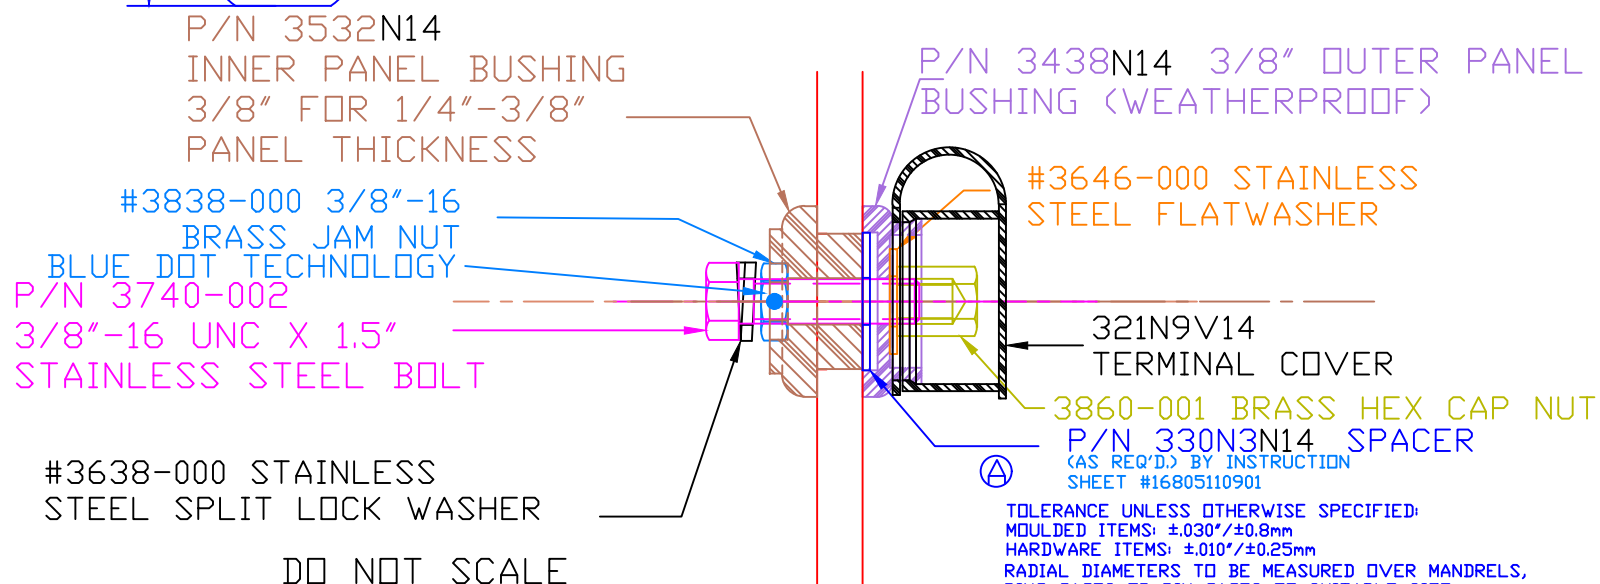

DO NOT SCALE

Ⓑ MAXIMUM RECOMMENDED FASTENER TORQUE:
S.S. JAM NUT- 180 IN./LBS.
BRASS JAM NUT- 72 IN./LBS.

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER

MAXIMUM AMPERAGE: 50 AMPS@ 12VDC

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB

TOLERANCE UNLESS OTHERWISE SPECIFIED:
MOULDED ITEMS: $\pm 0.30''/\pm 0.8\text{mm}$
HARDWARE ITEMS: $\pm 0.10''/\pm 0.25\text{mm}$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF:	DATE: 06AUG03	DRN BY: BRH CHK'D BY: BRH	WEIGHT:
TITLE: POWER CONNECTOR, AUX. 3/8" STUD 3/8" MAX PANEL			SCALE:
MATERIAL:		PART NO. 7A373214	
COLOR: BLACK	DRG CLASS REV B		