


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.


VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	3838-000 WAS 3838, 3844-003 ADDED 2 PLCS.	02MAR07	BRH
B	ADDED CALLOUT FOR SPACER AND INSTRUCTION SHEET	01MAY07	BRH
C	ADDED CALLOUT FOR P/N 379 PANEL SEAL	13FEB08	BRH
D	3739-001 WAS 3739	08MAR11	BRH
E	MAX. TORQUE SPECS UPDATED	16OCT14	BRH
F	3844-012 WAS 3844-003	11-03-16	JMM
G	REVISED TORQUE SPEC FROM 180 IN./LBS	8-25-17	RAS

USE GREENLEE
PUNCH ASSEMBLY
#60098 FOR PANEL
CUTOUT

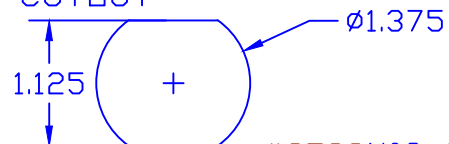

ASSEMBLY #7B3732N09W

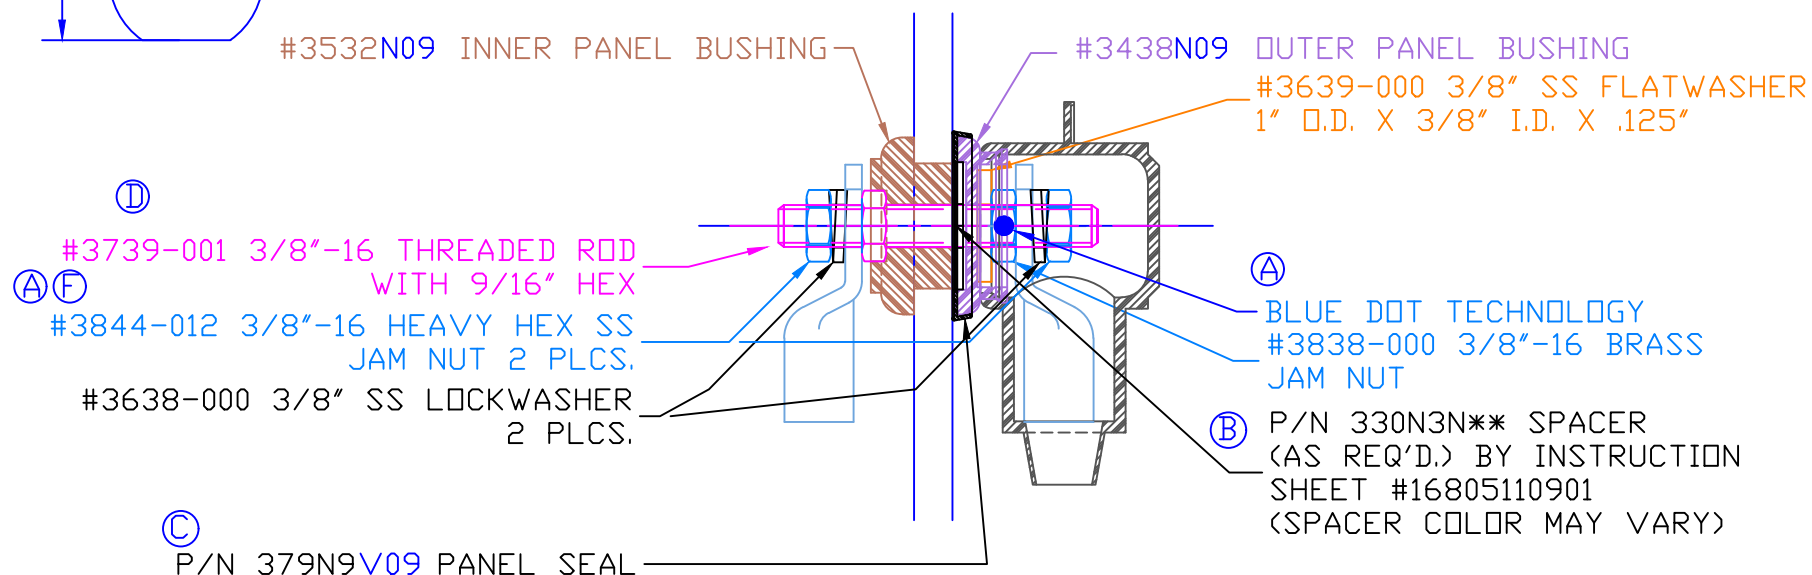

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.30^\circ / \pm 0.8\text{mm}$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER
MAXIMUM AMPERAGE: 300 AMPS @ 12VDC

(E) (G) MAXIMUM RECOMMENDED FASTENER TORQUE:
S.S. JAM NUT- 160 IN./LBS.
BRASS JAM NUT- 72 IN./LBS.

INCLUDES: 232N3V09 WEATHERPROOFING TERMINAL COVER

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB
VTE MATERIAL P/N: 7111210509

ITEMS SHOWN FOR ILLUSTRATIVE
PURPOSE, NOT INCLUDED:
1/0 GA. TERMINAL LUGS (2 PLACES)

DO NOT SCALE

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE: 02JAN03	DRN BY: BRH CHK'D BY: BRH	WEIGHT:
TITLE: POWER BUSHING 3/8" STUD 3/8" MAX PANEL WEATHERPROOF			SCALE:
MATERIAL:		PART NO. 7B3732N09W	
COLOR: BLUE	DRG CLASS	REV G	