


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	REDRAWN AND UPDATED	9-15-17	RAS
B	UPDATED DIMENSIONS AND ADDED "REFERENCE ONLY"	11-21-18	RAS
C	UPDATED DIMENSION FROM 2.587 [65.71]	11-21-18	RAS
D	UPDATED DIMENSIONS FROM 1.530 [38.86]	11-21-18	RAS

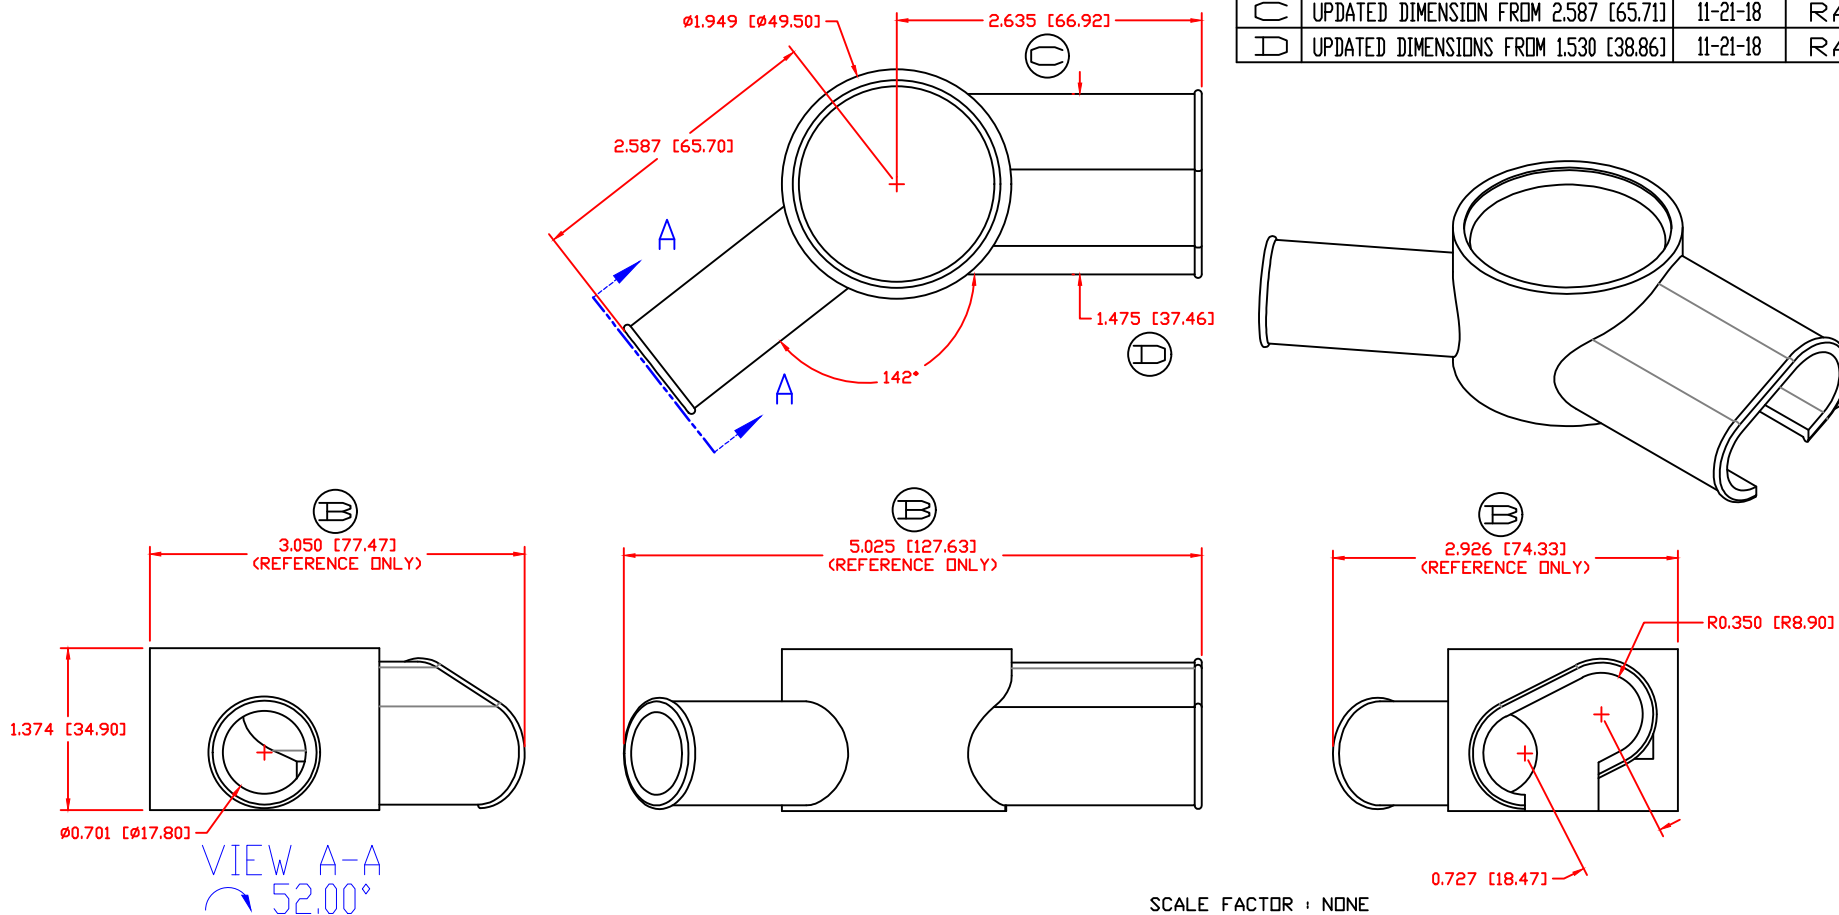

TYPICAL WALL THICKNESS .080 [2.03]

SCALE FACTOR: NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
MOLDED PARTS: ± 0.030 [±0.8mm]

MATERIAL PART NO:	1101700102
MATERIAL:	PVC
VENDOR PART NO:	7843-70-RED 6288
SHORE DUROMETER:	"A" 10 SEC. 70
SPECIFIC GRAVITY:	1.34
ULT. ELONGATION %:	350
MELTING TEMP:	320-340 F [160-171 C]
BRITTLE TEMP:	-22 F [-30 C]
TENSILE STRENGTH PSI:	1550 PSI
DIELECTRIC STRENGTH, V./mil:	553
U.L. RATING:	V0

		VTE Incorporated		
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914		
REF:	DATE:	DRN BY:	RAS	WEIGHT:
CUSTOMER DIMS	9-15-17	CHK'D BY:	PJK	073 LBS. / 32.9 G.
TITLE:		BATTERY CABLE BOOT		
MATERIAL:		PVC		PART NO. 955N9F02
COLOR:	RED	DRG CLASS	REV D	