


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
A	ADDED 125 AMP FUSE	9-13-06	BRH
B	ADDED PERFORMANCE SPECS.	12-20-07	BRH

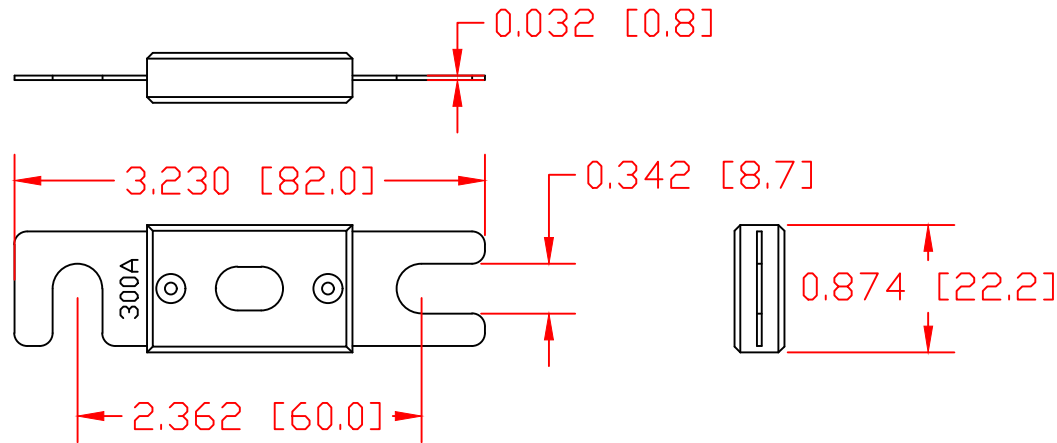

AMPERE RATING
50
60
80
100
125
150
200
250
300

(A)


(B)

SPECIFICATION:

- * Fast Acting Type
- * Visible Through Mica Window
- * Metal Elements are 24 Kt. Gold Plated
- * Body Material: PES
- * Interrupt Rating: 3000A 32V DC
- * Replaces ANL Fuses
- * High Performance Good for High Power Audio Systems, Lift Trucks and other Battery Operated Systems

SCALE FACTOR : NONE
 ALL DIMENSIONS GIVEN AS: in [mm]
 TOLERANCES UNLESS OTHERWISE SPECIFIED :
 MOLDED PARTS: ±.030" [±0.8mm]
 HARDWARE ITEMS: ±.010" [±0.25mm]

% of Ampere Rating	BLOW TIME
100 % Rating	4 Hours, Minimum
200 % Rating	15 Sec., Minimum



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	9-21-04	CHK'D BY:	BRH	
TITLE: ANL NARROW TYPE FUSES				
MATERIAL:			PART NO.	
COLOR:			ANF340***	
		DRG CLASS		