


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
△	ADDED PERFORMANCE SPECIFICATIONS	12-20-07	BRH

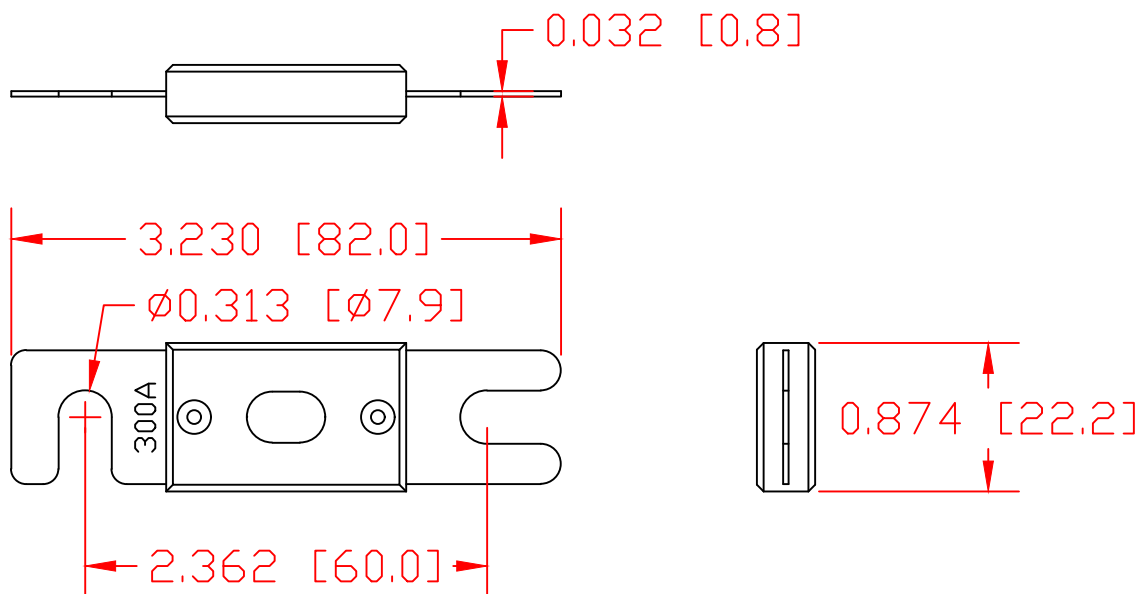

AMPERE RATING
300
350
400
500

SPECIFICATION:

- * Fast Acting Type
- * Visible Through Mica Window
- * Metal Elements are 24 Kt. Gold Plated
- * Body Material: CERAMIC
- * Interrupt Rating: 3000A 32V DC
- * Replaces ANL Fuses
- * High Performance Good for High Power Audio Systems, Lift Trucks and other Battery Operated Systems

(A)

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

% of Ampere Rating	BLOW TIME
100 % Rating	4 Hours, Minimum
250 % Rating	300 Sec., Maximum

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914		
REF:	DATE:	DRN BY:	BRH	WEIGHT:
CUSTOMER DIMS	12-07-04	CHK'D BY:	BRH	
TITLE: ANL CERAMIC TYPE FUSES				
MATERIAL:			PART NO.	
COLOR:	DRG CLASS	ANFC340***		