


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
△	UPDATED FASTENER USAGE	5/17/16	RAS

MAKE FROM: P/N 7376XL102

USE GREENLEE  
PUNCH ASSEMBLY  
#60098 FOR PANEL  
CUTOUT

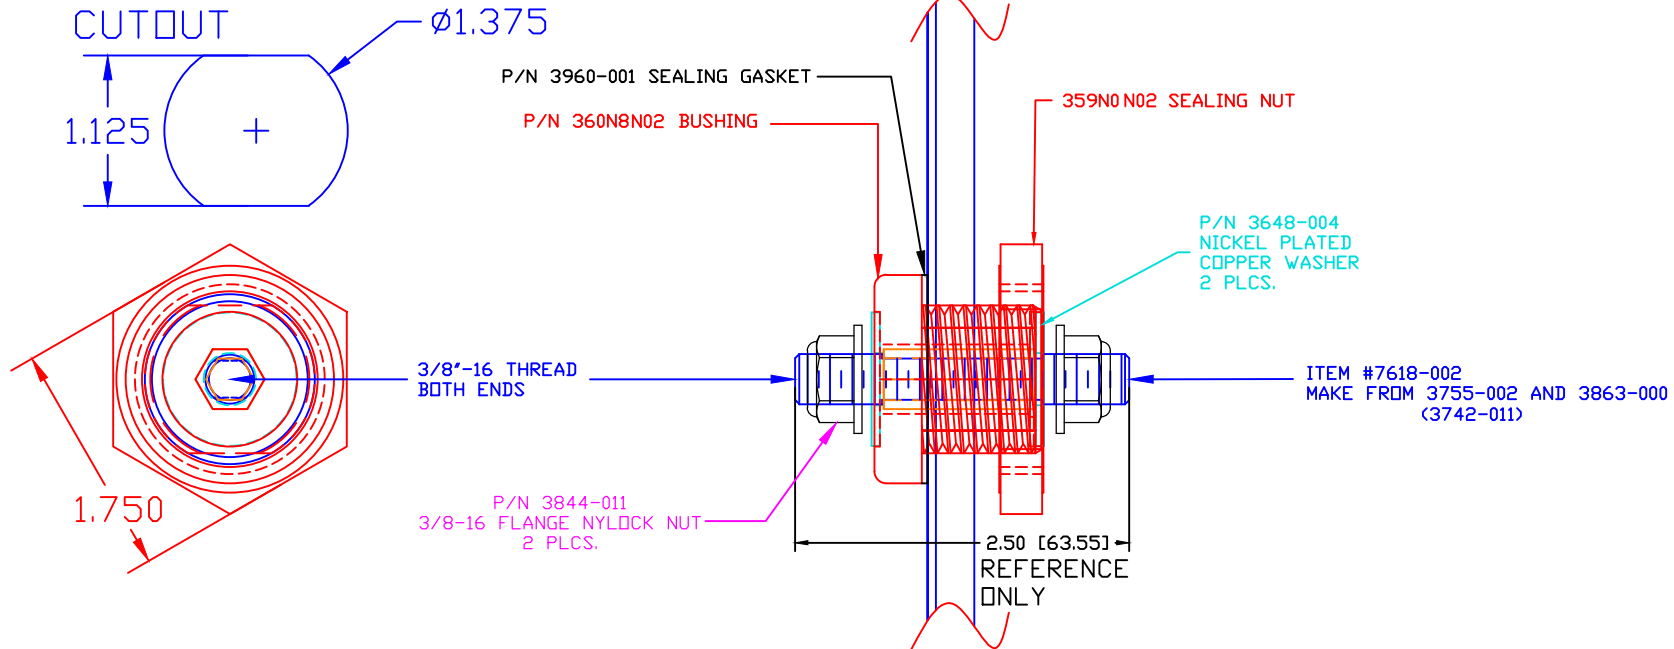

**MAXIMUM FASTENER TORQUES:**

NYLOCK NUTS: 15 FT./LBS. (180 IN./LBS.) RECOMMENDED FOR SINGLE USE  
SEALING NUT: 10 FT./LBS. (120 IN./LBS.)

CURRENT CARRYING CAPACITY:  
DUTY CYCLE:  
CURRENT CAPACITY:  
TEMPORARY MAX (12 MINUTES)


80%  
5.2 Kw (440 AMP @ 12VDC)  
6.6 Kw (550 AMP @ 12VDC)

BASE MATERIAL:  
BASE MATERIAL U.L. RATING:  
VTE MATERIAL P/N:

GLASS-REINFORCED NYLON  
94 HB  
7111210502



TOLERANCE UNLESS OTHERWISE SPECIFIED:  
MOLDED PRODUCTS ONLY: ±0.30"/±0.8mm  
HARDWARE ITEMS: ±0.010"/±0.25mm  
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
RING GAGES OR PIN GAGES OF SUITABLE SIZE

		<b>VTE Incorporated</b> 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF:	DATE: 22MAR16
TITLE: POWER BUSHING, COPPER CORE, FOR LITHIONICS			SCALE:
MATERIAL:		PART NO. <b>CCBXL102</b>	
COLOR:	DRG CLASS		