
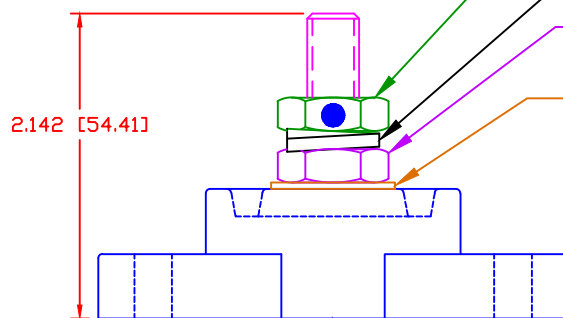



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT
A	3740-003 WAS 3740-010	9-14-09	BRH
B	PN 329NDV** CHANGED TO PN 329NDN**	6-27-16	MDL
C	3844-012 WAS 3844-003	11-07-16	JMM
D	3844-B00 WAS 3844-000	9-07-17	RAS

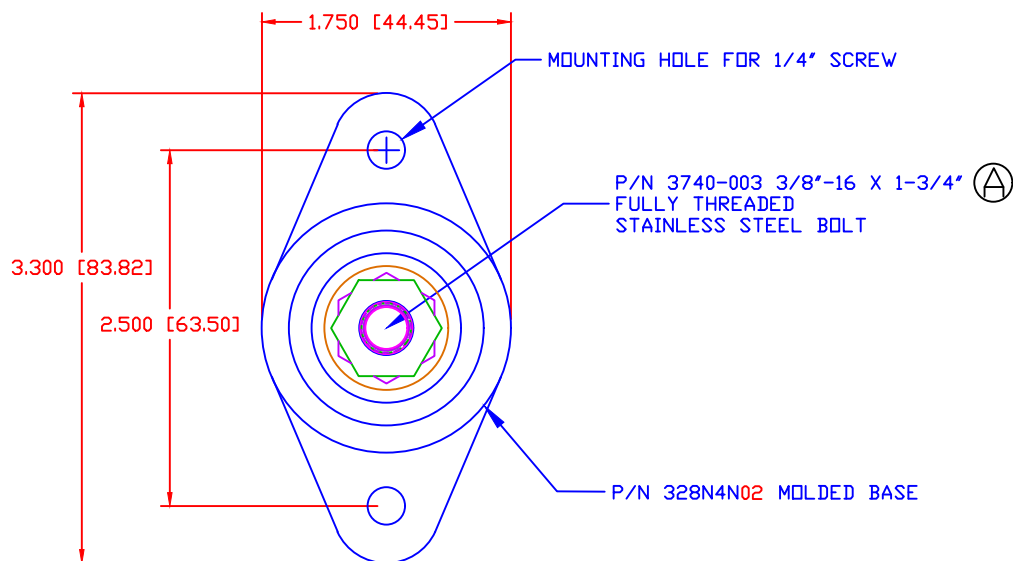

P/N 329NDN02 CAVITY PLUG (NOT SHOWN)

P/N 3844-B00 3/8"-16 TIN PLATED BRASS HEAVY HEX JAM NUT BLUE DOT TECHNOLOGY

P/N 3638-000 STAINLESS STEEL SPRING WASHER

P/N 3844-012 3/8"-16 STAINLESS STEEL HEAVY HEX JAM NUT (1 PLC) FACTORY ASSEMBLED TO 15 FT./LBS (180 IN./LBS)

P/N 3646-000 3/8" STAINLESS FLAT WASHER

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.030"/\pm 0.8\text{mm}$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB
DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
CURRENT RATING: 160 AMPS CONTINUOUS, 12VDC
350 AMPS AT 5 MINUTES MAX., 12 VDC.
TEMP. RISE AT LOAD: 52 DEG. F.
BREAKOUT TORQUE: 22 FT./LBS. (264 IN./LBS.)
RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

		VTE Incorporated	
		5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
REF:	DATE:	DRN BY: BRH	WEIGHT:
	8-06-09	CHK'D BY: BRH	
TITLE: 3/8" POWER DISTRIBUTION POST SPECIAL FOR LAWRENCE SCREW PRODUCTS			SCALE:
MATERIAL:		PART NO.	
COLOR: RED	DRG CLASS REV D	LSP77137XN02	