



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED, ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

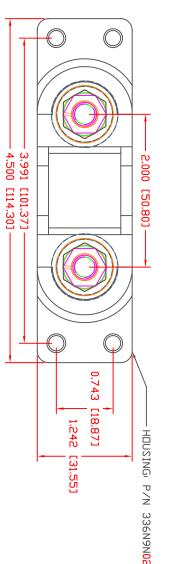

N							
٦	\equiv	J	\cap	Щ	\triangleright	LTR.	
REMOVED FACTORY TORQUE NOTE	3843-009 WAS 3843-001	331N0N** WAS 331N0V**	3843-001 WAS 3843-000, 3642-000 WAS 3642-A	3730-005 WAS 3730-004, 3843-000 WAS 3843A	ADDED 3645-C FLATWASHER	REVISIONS	
07-15-24	03-03-17	08-08-16	04-03-06	03-20-06	09-30-04	DATE	
RAS	RAS	MDL	BRH	BRH	BRH	INT.	

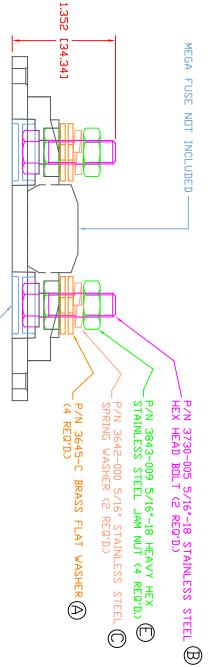





(2 REQ'D.)

FUSE NOT INCLUDED ASSEMBLY INCLUDES:

2-405N9V02 TERMINAL INSULATORS

MATERIAL PART NO:
MATERIAL:
VENDOR PART NO:
SPECIFIC GRAVITY:
MELTING TEMP;
U.L. RATING:

7111210502 GLASS FILLED NYLON HYLON N2015 HL NAT 1.23 515 F (268 C) UL 94 HB

5/16" NUT — MAXIMUM RECOMMENDED TORQUE: 144 IN./LBS, [16.2 Nm]

55 Fr

		1	1	
FAX: 231-539-0914	Telephone: 1-800-527-9256, 231-539-8000	Pellston, Michigan 49769	5437 Robinson Road, P.D. Box 790	VIE Incorporated

Ω	3	⊒		R.	
COLOR: RED	MATERIAL: GLASS FILLED NYLON	TITLE	CUSTOMER DIMS	REF:	
DRG CLASS	TLLED			DATE:	
REV F	NYLON	MEGA FUS	4-28-04		
<u> </u>	PART NO.	MEGA FUSE HOLDER	CHK'D BY: BRH	DRN BY:	
MFB736N9N02			뫄	BRH	
				WEIGHT:	