


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISI□NS	DATE	INT.
$\triangle$	CHANGED FROM BARE COPPER TO TIN COATED COPPER	14JUN17	RAS



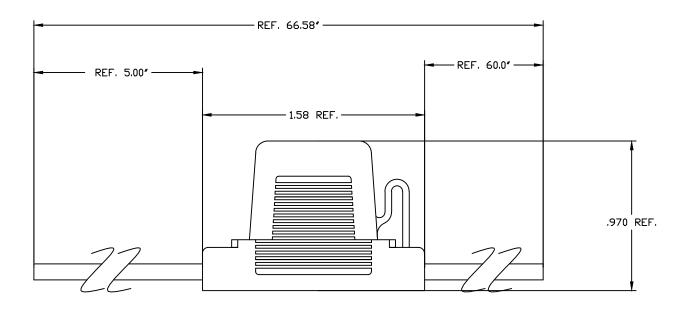



THIS ITEM IS ROHS COMPLIANT.

Wire Leads: 16 Ga.

Tin Coated "Stranded Copper 24+/-5 Strands PVC Insulated, Color Red 80 Deg. C. Min.

NOTE: NOT SUITABLE FOR CONTINUOUS DUTY OVER 20 AMPS @12VDC

ALL DIMENSIONS GIVEN AS: in [mm] MOLDED PARTS: ±.030" [±0.8mm] HARDWARE ITEMS: ±.010" [±0.25mm]



DO NOT SCALE