


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT
A	PN 329NDV02 CHANGED TO PN 329NDN02	6-23-16	MDL
B	3842-006 WAS 3842-003	03-24-17	JMM
C	4.248 WAS 4.231	03-29-17	JMM
D	REMOVED OPTIONAL COVER P/N 335N9P05	5-1-17	JMM

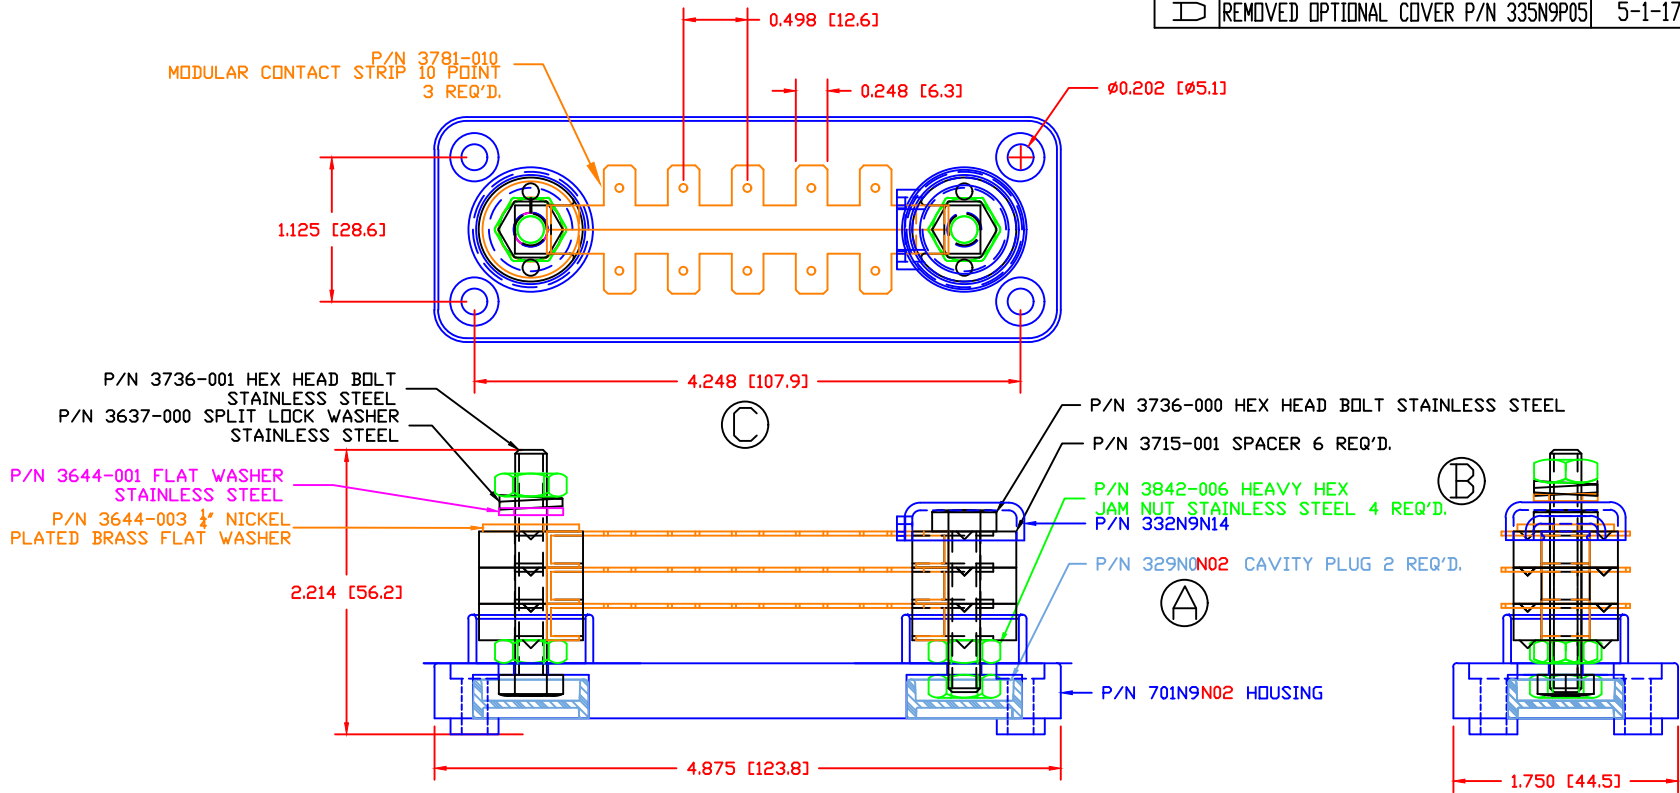

TOLERANCE UNLESS OTHERWISE SPECIFIED:
 MOLDED PRODUCTS ONLY: ±0.30"/±0.8mm
 HARDWARE ITEMS: ±0.010"/±0.25mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

MATERIAL PART NO: 7111210502
 MATERIAL: GLASS FILLED NYLON
 VENDOR PART NO: NYLON N2015 HL NAT
 SPECIFIC GRAVITY: 1.23
 MELTING TEMP: 515 F [268 C]
 U.L. RATING: UL 94 HB

MAXIMUM RECOMMENDED FASTENER TORQUE: 72 IN-LBS [8.14 Nm]

VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE: 5-21-08	DRN BY: BRH	WEIGHT: .287LBS [130.12g]
CUSTOMER DIMS		CHK'D BY: BRH	SCALE: NONE
TITLE: BUSBAR, TAB TYPE 30 POINT			
MATERIAL: GLASS-FILLED NYLON		PART NO. TT B730N02	
COLOR: RED	DRG CLASS	REV D	