


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR.	REVISIONS	DATE	INT.
	.355 WAS .315, .345 WAS .305, .255 WAS .215, .245 WAS .205, .220 WAS .180, .210 WAS .170 ADDED DIMENSIONS FOR FEATURE LINE ON FACE SURFACE	12AUG05	BRH
	ADDED R. 0.060*4 PLCS, , R.0.250* WAS .500*	14JUN07	BRH

P/N 31225N14 BASEPLATE

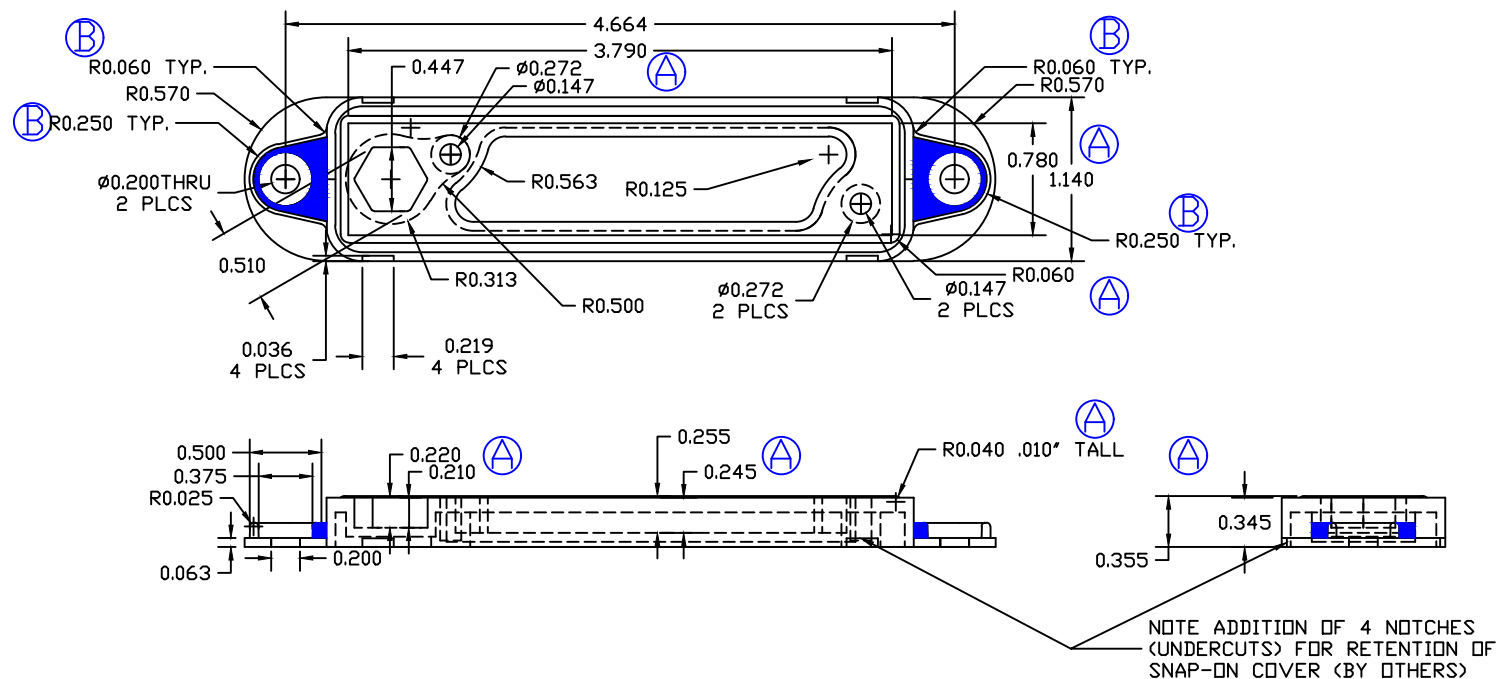

ALL DIMENSIONS GIVEN AS: in [mm]
 MOLDED PARTS: ± 0.030 " [± 0.8 mm]
 HARDWARE ITEMS: ± 0.010 " [± 0.25 mm]

VTE PART NO:
 MATERIAL:
 VENDOR PART NO:
 SPECIFIC GRAVITY:
 MELTING TEMP:
 U.L. RATING:

1111210514UL
 GLASS FILLED NYLON
 DURETHANE BKV 15 H 2.0 901510
 1.23
 415 F [213 C]
 UL 94 HB

DO NOT SCALE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: QA DIMS	DATE: 27JUN05
TITLE: 1/4" 12 WAY CONTACT BLOCK BASE			
MATERIAL: GLASS FILLED NYLON		PART NO. 31225 N14	
COLOR: BLACK	DRG CLASS		