
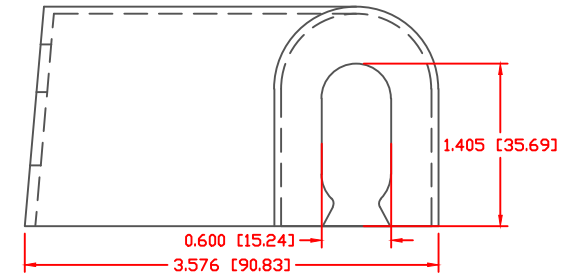
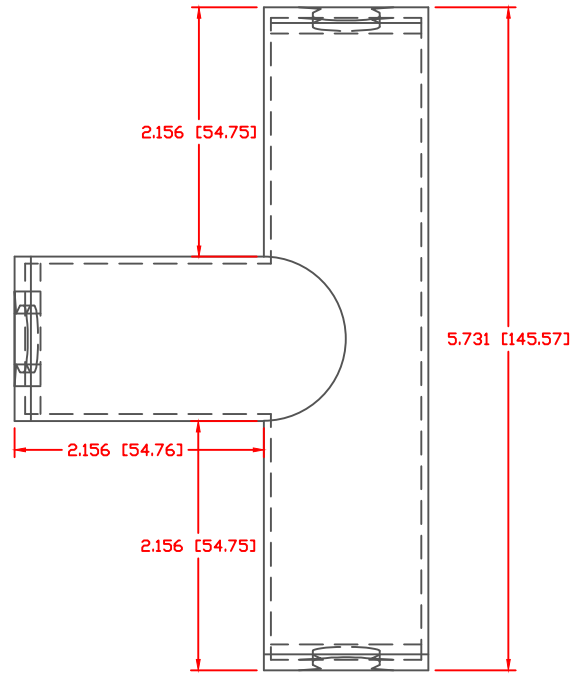


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

| LTR. | REVISIONS | DATE | INT. |
|------|-----------|------|------|
|      |           |      |      |

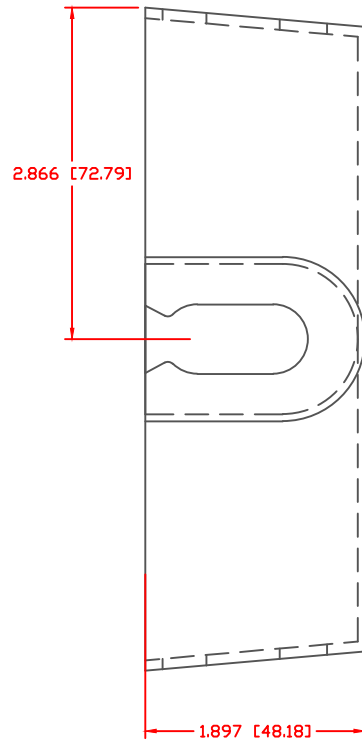

ALL DIMENSIONS GIVEN AS: In [mm]  
 MOLDED PARTS: ±.030" [±0.8mm]  
 HARDWARE ITEMS: ±.010" [±0.25mm]

VTE PART NO:  
 MATERIAL:  
 SHORE DUROMETER:  
 SPECIFIC GRAVITY:  
 ULT. ELONGATION %:  
 MELTING TEMP:  
 Tensile Strength PSI:

120750315  
 POLYPROPYLENE  
 75 D  
 1.25  
 2.5  
 324 F [162 C]  
 4250



**VTE Incorporated**  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

|         |          |                      |                   |
|---------|----------|----------------------|-------------------|
| REF:    | DATE:    | DRN BY:              | WEIGHT:           |
| QA DIMS | 05-12-06 | BRH<br>CHK'D BY: BRH | .119 LBS [54.0 g] |

TITLE: 3 CABLE TERMINAL INSULATOR

|                         |          |
|-------------------------|----------|
| MATERIAL: POLYPROPYLENE | PART NO. |
| COLOR: RED              | 375T5P02 |
| DRG CLASS               |          |

DO NOT SCALE