
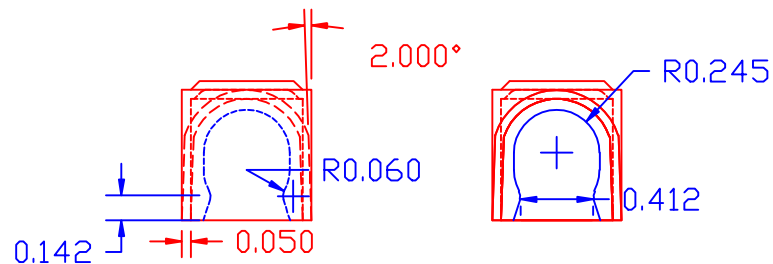
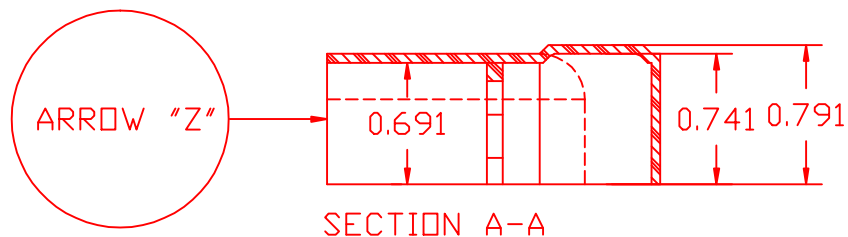



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

| LTR. | REVISIONS | DATE |
|------|-----------|----------|
| ✖ | ***** | 00-00-98 |

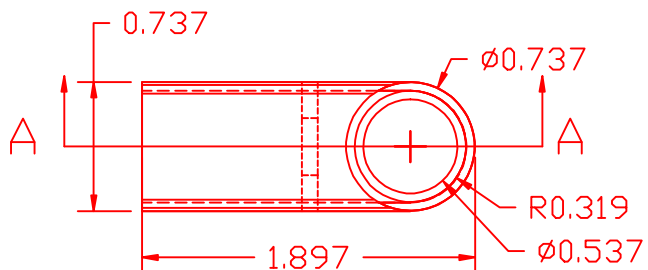


VIEW IN DIRECTION OF ARROW "Z"

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

Material:
 Material Part No
 Shore Durometer
 Specific Gravity:
 Ult. Elongation %:
 Tensile Strength PSI:
 U.L. Rating:

RED PVC
 M105-95 RD
 "A" 10 SEC. 98/92
 1.42
 217
 2123
 94 V2
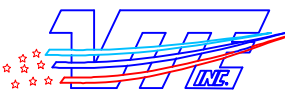
| | | | |
|---|-----------------|---|---------------|
|  | | VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914 | |
| | | REF: ***** | DATE: 01AUG05 |
| TITLE: SOLENOID TERMINAL INSULATOR | | | SCALE: |
| MATERIAL: | | PART NO. | |
| COLDR: ***** | DRG CLASS ***** | 216T9V02 | |