
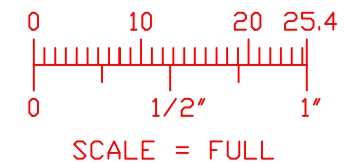
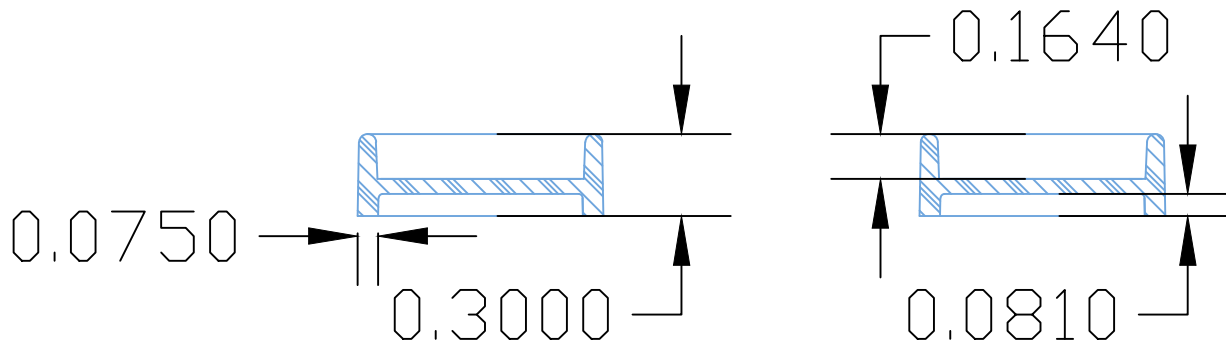



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
≠	*****	00-00-98

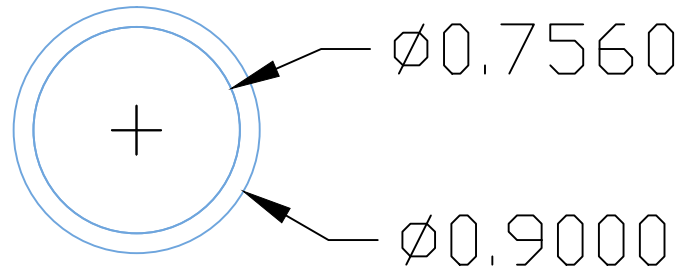

PART NO: 1101650105
 MATERIAL: YELLOW PVC
 MATERIAL PART NO: 9812-65 YELLOW 405
 SPECIFIC GRAVITY: 1.34
 HARDNESS 10 SEC: 65
 HARDNESS SCALE: A
 TENSILE STRENGTH, PSI: 1550
 ELONGATION, %: 400
 TEAR STRENGTH, PPI: 230
 FLAME CLASS UL: V2
 BRITTLENESS TEMP., DEGREES C: -48
 MELT TEMP., DEGREES F: 315-335
 DIELECTRIC STRENGTH, V./MIL: 514

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.30*/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: *****	DATE: 26OCT05
TITLE: CAVITY PLUG			SCALE:
MATERIAL: *****		PART NO. 329N0V05	
COLOR: *****	DRG CLASS *****		