
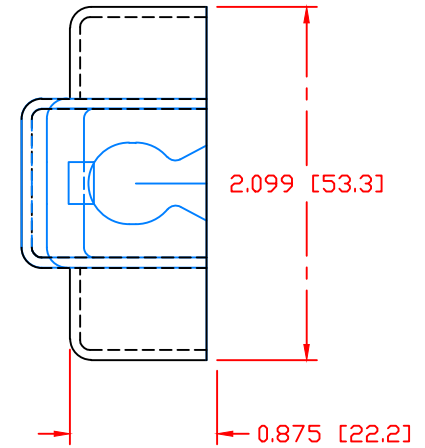


PROPRIETARY RIGHTS ARE CLAIMED FOR THE INFORMATION DISCLOSED IN THIS DRAWING. RELEASE OF THIS DESIGN TO ANY THIRD PARTY CONSTITUTES A VIOLATION OF OUR COPYRIGHT.

LTR.	REVISIONS	DATE
△	ADDED WALL SECTION AT REAR OF SHROUD	06-04-99

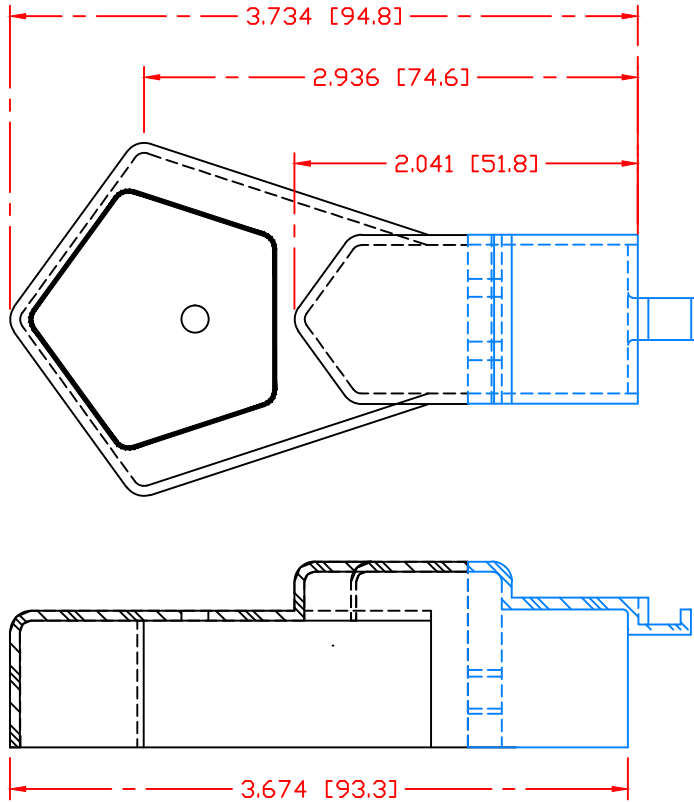

436N5

DESIGNED TO FIT 35, 50 OR 70 mm² METRIC CABLE
 FITS THE FOLLOWING BATTERIES:

UPS 12-475 WITH 35, 50 AND 70 MM² CABLE

MATERIAL: HALOGEN FREE, FIRE RETARDANT THERMOPLASTIC OLEFIN
 ELONGATION: 200%
 MEETS: U.L. 94-V2
 LIMITING OXYGEN INDEX: 37%
 COLOR: BLACK
 SPECIFIC GRAVITY: 1.05 - 1.10
 MINIMUM TENSILE STRENGTH: 1500 PSI

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.30°/±0.8mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF: *****	DATE: 06-15-99	DRN BY: BRH	WEIGHT: *****
TITLE: BATTERY TERMINAL INSULATOR			SCALE: NONE
MATERIAL: *****		PART NO.	
COLOR: *****	DRG CLASS *****	436N5H14	